# swift 2.0


9to5 seating



EXPRESSSHIP FABRICS

MOMENTUM TEXTILES & WALLCOVERING


Grade C

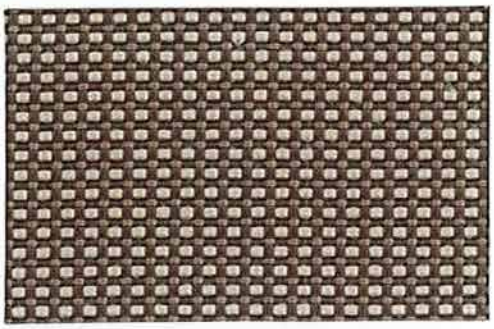

Grid Chrome



Sunbeam



Surf



Indigo



Flint




Khaki




Jet

Grade B

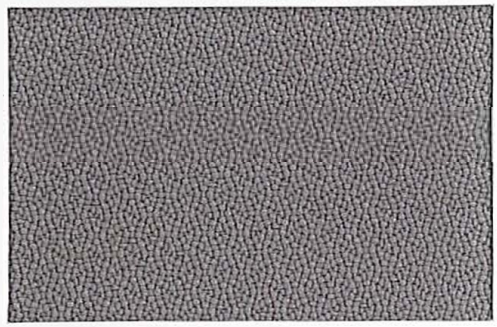

Origin Alloy



Arundel



Indigo



Sapphire



Iron




Poppy



Jet

Grade D

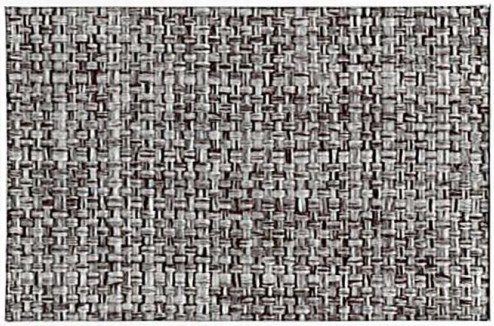

Mello Mineral




Zest



River



Ink



Parchment



Ash




Sable


Grade D



Feltro Cloud



Spa



Steel



Dusk



Birch



Berry




Ink


Grade D



Guru Morel



Sumac




Tahoe



Pewter



Tawny




Kiwi



Onyx

Grade D

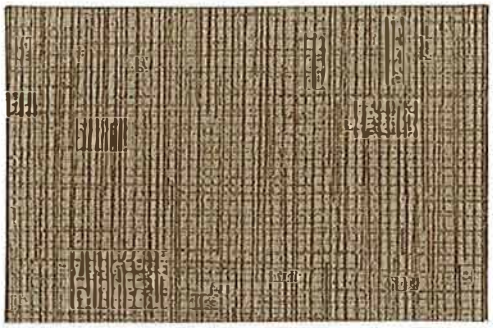

Beeline EPU Oat



Sprout



Walnut



Eclipse



Jetty



Lake



Tidal

Grade D



Canter EPU Quarry



Nimbus



Kiwi Green



Bordeaux



Storm




Night



Onyx

Grade C

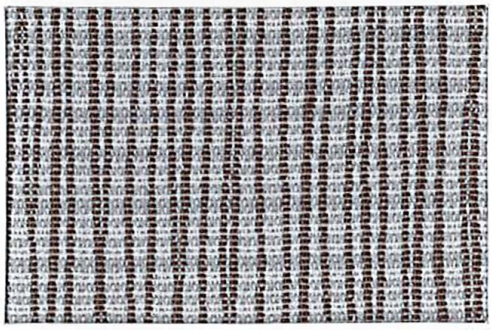

Graph Alpine




Ruby




Wave



Anchor



Parrot



Chalice



Coal

Grade D



Deka Bisque



Desert



Peridot



Garnet



Refresh




Nordic




Charcoal

Grade D

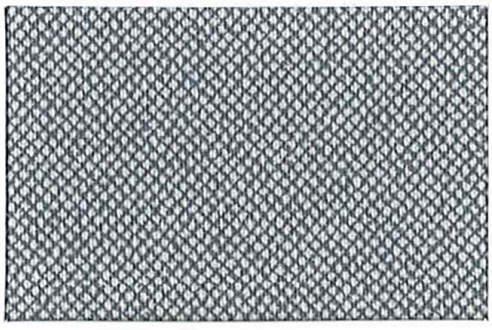


Tribeca CV Cloud




Downpour




Airy




Mariner



Mica



Cascade



Griffin

## 9to5 Seating's ExpressShip Fabric Program

***Need it fast?*** We have you covered with a wide variety of upholstery options! Our ExpressShip program offers expedited shipment on our seating products. The ExpressShip Program includes Momentum Swift 2.0 and the 9to5 Seating cards including Signature, Nautilus, Breeze, Vivid, M1, M2, M3 and M4.

# info

| Width - Pattern | Fiber Content & Backing | Finish | Abrasion (D.R.) | Lightfastness | Approximate Repeats | Cleaning Code | Grade |
|---|---|---|---|---|---|---|---|
| 54" Beeline EPU | 100% EPU Polyurethane Polyester Backing | | 900,000 | 200 Hours Class 4 | | W Bleach Cleanable (4:1) | D |
| 54" Canter EPU | 100% EPU Polyurethane Polyester Backing | | 1,000,000 | 200 Hours Class 4 | | W Bleach Cleanable (4:1) | D |
| 56" Graph | 75% Repreve® Post Consumer Recycled Polyester, 25% Polyester Acrylic Backing | | 170,000 | 40 Hours Class 5 | 3 3/8" L 7 1/2" W | W | C |
| 58" Origin | 100% Post Consumer Recycled Polyester Acrylic Backing | | 282,000 | 40 Hours Class 4 | | WS | B |
| 56" Deka | 63% Post Consumer Recycled Polyester, 37% Polyester Acrylic Backing | PFAS-Free Stain Resistant | 200,000 | 40 Hours Class 4 | | WS | D |
| 54" Tribeca CV | 100% Clean Vinyl/Phthalate Free Polyester Backing | Protective Overcoat | 100,000 | 200 Hours Class 4 | | WS Bleach Cleanable (10:1) | D |
| 54" Grid | 64% Repreve® Post Consumer Recycled Polyester, 36% Polyester Acrylic Backing | | 160,000 | 40 Hours Class 4 | | WS | C |
| 56" Mello | 80% Post Consumer Recycled Polyester, 20% Polyester Acrylic Backing | PFAS-Free Stain Resistant | 115,000 | 40 Hours Class 4 | | WS | D |
| 56" Feltro | 100% Polyester | PFAS-Free Stain Resistant | 115,000 | 40 Hours Class 4 | | WS | D |
| 56" Guru | 100% Solution Dyed Polypropylene Acrylic Backing | | 100,000 | 40 Hours Class 5 | | WS | D |

All patterns are FR free.

®ACT® Registered Certification Marks

### Icon Upholstery Definitions

**Fire Retardancy**
Flammable testing determined as fabric's resistance to burning.
PASSES - California 117

**Colorfastness To Wet & Dry Crocking**
Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric unto clothing, hands or other materials and can occur under wet or dry conditions.
PASSES - AATCC 8-1974 Dry Crocking, Class 4 minimum: Wet Crocking, Class 3 minimum.

**Abrasion**
Abrasion is the ability of fabric to withstand damage from wear and rub. This is a general contract specification as well as a heavy duty specification.
PASSES -

General Contact: ASTM 3579 modified (#10 cotton duck); 15,000 double rubs Wyzenbeek Method

Heavy Duty: ASTM 3579 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 (with 21oz. weight); 40,000 rubs Martindale Method

**Colorfastness to Light**
Colorfastness to light is the degree to which fabric will retain its color when exposed to light.
PASSES - AATCC 16A-1974 or AATCC 16E-1976;Class 4 minimum at 40 Hours. NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations.

**Physical Properties**
3 Physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seam.
PASSES - Brush Pill ASTM D3511, 3-4 minimum. Breaking Strength ASTM D3597-D1682-64 (1975) 50lbs. minimum in warp & weft Seam Slippage ASTM D3597-D434-75 25lbs. minimum in warp & weft.

W: Water-based foam or cleaner.

WS: Water-based cleaning agents, foam, or solvent-based cleaners may be used. CAUTION: Use of water-based or detergent-based solvents may cause spotting, shrinking and/or permanent water stains. Solvent cleaning agents will remove water stains.

BC: Bleach Cleanable. Bleach cleanability is desired for any textile that may need to be disinfected or sterilized. Refer to the above chart for exact water to bleach solution. Rinse with water after cleaning.


9to5 seating

**PHONE** 888.925.SEAT
**FAX** 866.925.SEAT
**EMAIL** sales@9to5seating.com

3211 Jack Northrop Ave.
Hawthorne, CA 90250
**9to5seating.com**
Follow us @9to5seating


For memo samples please contact:

MOMENTUM TEXTILES & WALLCOVERING
Toll Free 800-366-6839
momentumtextilesandwalls.com

©2025 9to5 Seating • LIT-C-MOMSWIFT-V24