

9to5 seating

EXPRESSSHIP FABRICS

swift

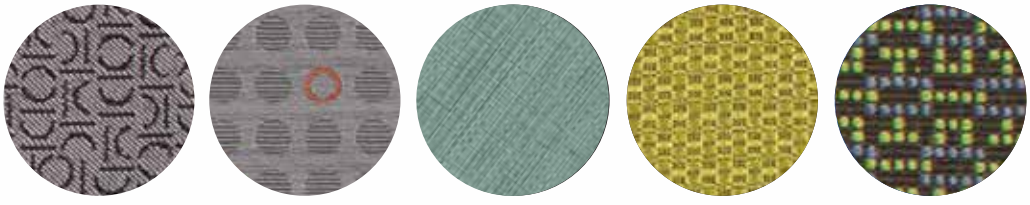

MOMENTUM TEXTILES

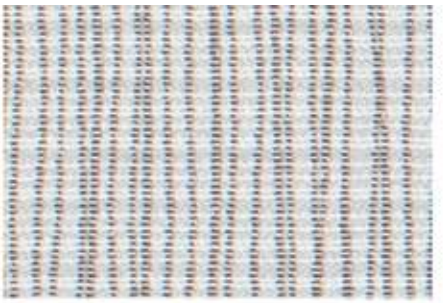

GRAPH ALPINE



POPPY



TIDAL



BARK



PARROT



LAPIS



COAL



ORIGIN EUREKA



ECO



GARNET



SAPPHIRE



SODALITE



IRON



JET



KNACK FILAMENT



TEAK



ZING



BRISK




REED



FRESCO



CARBON

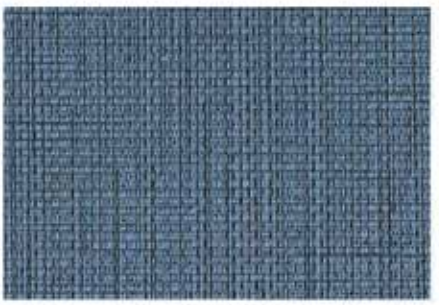

BEELINE TIDAL



SPROUT



NIMBUS



FORGE




GEYSER



PORTOBELLO



WALNUT

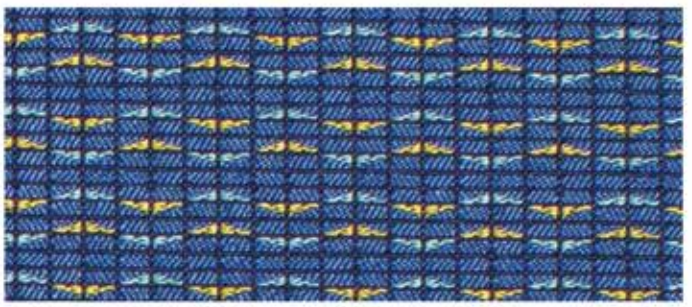

SLICE ADMIRAL



MILLER




PUMICE



HENNA




CHARCOAL

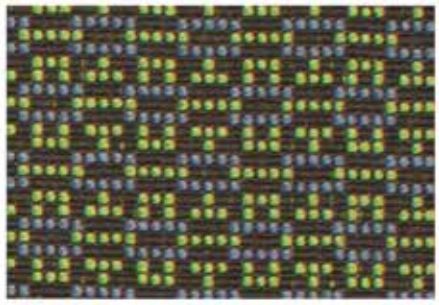
BOBBY MOSS


LEMON


GLOW


AQUA


FUSCHSIA


IRIS


ANCHOR


FUSE LUNAR


PRISTINE


GINGER


WALNUT


AZUREAN


CARMINE


PEPPER


EPIC KIWI


LIMESTONE


SLICE


PORCINI


AZURE


STEEL


GRANITE


CANTER IRON


SAND


SAFARI


SABLE


EARTH


NIGHT


ONYX


PARENTHESIS STEEL


VIOLET


LIME


CAPRI


CHARCOAL

Width - Pattern	Fiber Content & Backing	Finish	Abrasion (D.R.)	Light-fastness	Approx. Repeats	Cleaning Code	Grade
54" BEELINE	100% Polyurethane Polyester Backing		500,000	200 Hrs. Class 4.5		W Bleach Cleanable (4:1)	C
56" BOBBY	68% Post Consumer Recycled Polyester, 32% Polyester Acrylic Backing	Soil and Stain Resistant	150,000	40 Hrs. Class 3.5	⅞" L, ½" W	WS	B
56" CANTER	100% Polyurethane Polyester Backing		240,000	200 Hrs. Class 4.5		W Bleach Cleanable (4:1)	B
54" EPIC	50% Polyester, 32% Post Industrial Recycled Polyester, 18% Post Consumer Recycled Polyester, Acrylic Backing	Soil and Stain Resistant	100,000	40 Hrs. Class 5	⅜" L, ⅛" W	WS	C
54" FUSE	65% Post Industrial Recycled Polyester, 35% Post Consumer Recycled Polyester, Latex Backing	Soil and Stain Resistant	100,000	40 Hrs. Class 4.5		WS	B
56" GRAPH	75% Post Consumer Recycled Polyester, 25% Polyester Acrylic Backing	Soil and Stain Resistant	170,000	40 Hrs. Class 5	3 ⅜" L, 7 ½" W	W	B
54" KNACK	100% Post Consumer Recycled Polyester, Acrylic Backing	Soil and Stain Resistant	100,000	40 Hrs. Class 5	1 ⅝" L, 1 ¾" W	WS	C
58" ORIGIN	100% Post Consumer Recycled Polyester Acrylic Backing	Soil and Stain Resistant	282,000	40 Hrs. Class 4		WS	B
54" PARENTHESIS	50% Post Consumer Recycled Polyester, 50% Polyester Acrylic Backing	Soil and Stain Resistant	165,000	40 Hrs. Class 4.5	9 ⅛" L, 1 ⅛" W	WS	B
54" SLICE	84% Post Consumer Recycled Polyester, 16% Polyester Acrylic Backing	Soil and Stain Resistant	80,000	40 Hrs. Class 5	⅞" L, ¾" W	WS	B

*ACT® Registered Certification Marks

EXPLANATION OF **ACT** ICONS FOR UPHOLSTERY

FIRE RETARDANCY

Flammability testing determined as fabric's resistance to burning.

PASSES
California 117 2013

COLORFASTNESS TO WET & DRY CROCKING

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions.

PASSES
AATCC 8-1974 Dry Crocking, Class 4 minimum; Wet Crocking, Class 3 minimum

COLORFASTNESS TO LIGHT

Colorfastness to light is the degree to which fabric will retain its color when exposed to light.

PASSES
AATCC 16A-1974 or AATCC 16E-1976; Class 4 minimum at 40 hours
NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations

PHYSICAL PROPERTIES

3 physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seams.

PASSES
Brush Pill ASTM D3511, 3-4 minimum
Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft
Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft

ABRASION

Abrasion is the ability of a fabric to withstand damage from wear and rubbing. There is a general contract specification as well as a heavy duty specification.

PASSES

a General Contract — ASTM 3597 modified (#10 cotton duck); 15,000 double rubs Wyzenbeek Method

A Heavy Duty — ASTM 3597 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 (with 21 oz. weight); 40,000 rubs Martindale Method

CLEANING CODE DEFINITIONS

WS: Water-based cleaning agents or foam.

GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818

For memo samples please contact.
MOMENTUM TEXTILES
Toll Free 800-366-6839
memosamples.com

9to5 seating

9 to 5 Seating
3211 Jack Northrop Ave.
Hawthorne, CA 90250
Tel: 888.925.SEAT --> 888.925.7328
Fax: 866.925.SEAT --> 866.925.7328