
PRODUCT SPECIFICATIONS

Toggle™ Tables

Control Unit

July 2018



TECHNICAL SPECIFICATIONS

Features

- Highly-efficient Switch Mode Power Supply (SMPS).
- Low standby power consumption, low field emissions.
- Table height display with up to three memory positions (depending on remote control).
- ISP (Intelligent System Protection).
- Container/Shelf Stop Programming.
- Enhanced Drive Comfort.
- Integrated two button switch.

Table Specs - Toggle Dual Motor	
Base Widths	• 43.31"-70.87"
Foot Options	• 24" & 30"
Height Range	• 26"-52"
Speed	• 1.4 inches per second
Base Operating Capacity	• 264 lbs

Note:

- Don't disassemble the control unit or motor housing under any circumstances as there is a danger of electric shock.
- The control unit may only be operated with main voltage as specified on the type plate. Control units are also available for the main voltages used in other countries.
- Only use the power cord supplied with the control unit. Check that it is not damaged and do not ever operate the table control unit if the power cord is damaged.
- The control unit must be mounted before commissioning and operation.
- When installing the control unit and putting it into operation, be sure that the table is acclimatized to the temperature and humidity values for operation, shown on the next page.
- In the event of a fault, please contact customer service immediately. Only original spare parts may be used for repairing the control units. Parts may only be replaced by qualified service technicians, otherwise the warranty/guarantee shall be null and void.
- Do not expose the control unit to moisture, drips or splashes.
- If unnatural fumes occur, unplug the power cord immediately and contact customer service.


TECHNICAL DATA

GENERAL	
Supply Voltage	• EU: 207-253 V / 50-60Hz • US: 90-127V / 50-60Hz
Nominal Voltage	• EU: 230V / 50 Hz • US: 120V / 60Hz
Power draw at normal operation	• ≤128 W
Standby power, primary (typical)	• ≤0.3 W
Operating voltage for internal and external electronics	• VDC + or - 15% 250mA
Operating voltage for internal and external electronics in standby mode (average)	• VDC + or - 15% 7mA
Precision of Motor current measurement @ 100% Output Voltage and 4-8A	• + or - 15%
Ambient temperature	• 32-86°F (0-30°C)
Relative humidity (for operation)	• 5-90% (non condensing)
Storage and transport temperature	• -40-185°F (-40-85°C)
Relative humidity (for storage)	• 5-90% (non condensing)

CONTROL UNIT	
Switching cycles Depicted currents are sums over all motor channels	Normal cycle 2/18: 2min move: 4A@32V 128W Pause: 18 minutes
Maximum current per motor channel	• 8A Maximum sum current restricted according to values shown above
Weight (typical)	• 347g

3.1 PIN ASSIGNMENT

1 = Motor Socket 1 (M1)
2 = Motor Socket 2 (M2)
S = Remote Control Socket
P = Power Socket
HS = Integrated Remote Control

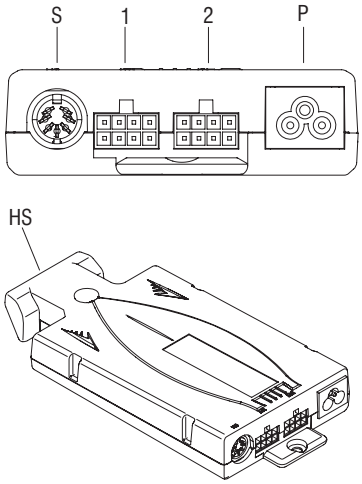


SMART-e-2-SPFE Control Unit

KI Furnishing Knowledge®


TECHNICAL DATA (cont.)

LEG MOTOR

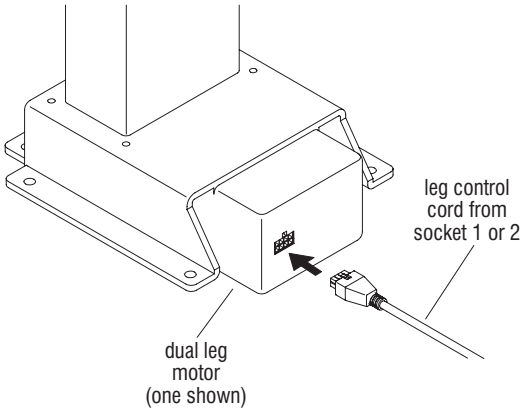


Dual Motor Leg

REMOTE OPTIONS



Flat Two Button Remote Control



Programmable Remote Control with Display


3.2 INTELLIGENT SYSTEM PROTECTION (ISP) - ANTI PINCH

- Pay attention to the following instructions if you are using the new anti-pinch feature ISP (= Intelligent System Protection).

WARNING: In spite of ISP being in place, there may still be a risk of pinching in exceptional cases, as it is not only the control unit, but also the interaction between the mechanical and electronic systems that is responsible for cutting out the motor. In addition, the mechanical components, motor and ambient conditions all affect cut-out sensitivity. As the table manufacturer, KI cannot therefore eliminate this residual risk completely or accept any liability.

3.3 TYPE PLATE

- The following figure shows the type label and its location on the control box housing.

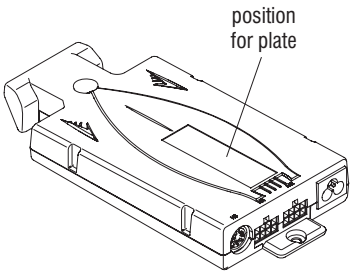

SMART-e-2-SPFE Control Unit

Furnishing Knowledge®

TECHNICAL DATA (cont.)

END OF LIFE DISPOSAL

- When the SMART-e-SPFE control unit is no longer required, please note the following for disposal:

NOTE: The SMART-e-SPFE control unit is electrical, or electronic equipment according to directive 2002/96/EC and therefore marked with the symbol depicted on the right.



NOTE: Ensure eco-friendly disposal of all control unit components (separate the plastic and electronic parts for collection). Also ensure eco-friendly disposal of all other components (drives, cables, etc.).

STANDARDS

EUROPE

- EN 60335-1:2012 (IEC 60335-1:2010 Fifth Edition)
- DIN EN ISO 13849-1: 2008, Kategorie B, Performance Level b
- DIN EN 62233:2008
- DIN EN 61000-6-3:2007+A1:2011
- DIN EN 61000-6-2:2005

NOTE: This product is RoHS compliant according to directive 2002/95/EC.

NOTE: This product is REACH compliant according to directive 2006/121/EC (Edict 1907/2006).

USA AND CANADA

- UL 60950-1, 2nd Edition
- CSA C22.2 60950-1, 2nd Edition

1330 Bellevue Street • P.O. Box 8100 • Green Bay, WI 54308-8100 • 1-800-424-2432 • www.ki.com
© 2018 Krueger International, Inc. All Rights Reserved • Code KI-62686R2/KI/PDF/0718

Furnishing Knowledge®

PRODUCT SPECIFICATIONS

Toggle™ Tables

Models EL, ELC, SS & FX

June 2020

TECHNICAL SPECIFICATIONS







Toggle Dual & Triple Motor Electric-Base (Model EL, ELC & SS)

General
The Model EL table consists of two adjustable height T-bases (centered column on a horizontal foot). The Model ELC table consists of two adjustable height C-Bases (off centered column on a horizontal foot). Bases attach to a tabletop support that spans the two bases. The Model SS table consists of three adjustable height C-Bases (off centered column on a horizontal foot). Bases attach to the tabletop support that spans the three bases. All tabletops adjusts between 25" and 51" from the floor by means of electric controls that can be located at either end of the table.

Base
The base consists of a column assembly and foot both finished with baked-on 30-sheen powder-coat paint. The column assembly consists of an outer member, an intermediate member and an inner member. The outer member consists of a $2^{3}/_{8}$" x $4^{3}/_{8}$" rectangular 14-gauge steel tubing with a $^{1}/_{4}$" steel plate welded on the top end. The intermediate member consists of a 2" x 4" rectangular 14-gauge steel tubing. The inner member consists of a $1^{1}/_{2}$" x $3^{1}/_{2}$" rectangular 14-gauge steel tubing with a $^{1}/_{4}$" steel plate welded on the bottom end. A 6-gauge formed steel motor housing is welded to each outer leg member for strength. The foot consists of an extruded aluminum component with a nylon toe cap inserted into each end. The foot is attached to the column with four 6 mm bolts. Two $1^{1}/_{2}$" diameter nylon base leveling glides are threaded into the foot.

Tabletop Support
The tabletop support consists of a 14-gauge 1" x 1" steel tubing attached to each leg column with 6 mm bolts. An 11-gauge U-shaped cross member connects each leg assembly for stability.

Tabletop
Tabletops are constructed with $1^{1}/_{8}$" thick 45 lb density particleboard core. The top surface is covered with high-pressure laminate. The bottom surface is covered with a phenolic backing sheet. The perimeter is finished using high-impact plastic edging. Model EL and ELC tabletops are pre-drilled and attached to the bases using eight M5.5 x 22 pan head screws. Model SS tabletops are pre-drilled and attached to the bases using sixteen M5.5 x 22 pan head screws.

Control Box
The control box comes standard with an integrated two button controller. Tables also ship standard with a more compact corded two-button remote control switch. This allows two switch options for every customer. All table controllers come standard with programmable container/shelf stop, and ISP (Intelligent System Protection). The stand-by power consumption is 0.3 watts. Refer to "Toggle Control Unit Product Specifications" (KI-62686) for more details.

Wire Trough
The wire trough is an optional accessory which must be ordered separately. Constructed of 18-gauge steel with a powder-coated finish which may be coordinated to match the color of table legs. Screws are provided for attachment to the underside of the tabletop, and tops are pre-drilled for wire trough locations. Provides six access holes to feed wires or install cable management systems.

Polyester Felt Modesty Panel
Modesty panels are constructed from a sound-absorbing, 100% polyester felt with an acoustic rating of 0.45-0.90 NRC. The panel is $^{1}/_{2}$" thick with a density of .05 lb/ft. Panels are in accordance with ASTM-E84 and achieve a Class A Flame Spread. Standard sizes are $9^{1}/_{4}$" high by $46^{1}/_{2}$", $52^{1}/_{2}$", $58^{1}/_{2}$", $64^{1}/_{2}$", $70^{1}/_{2}$" and $82^{1}/_{2}$" wide.

Mounting Hooks
The mounting hooks are 18-gauge steel and attach underneath the tabletop using two steel screws. Panels $46^{1}/_{2}$" wide use two hooks per panel. Panels $52^{1}/_{2}$", $58^{1}/_{2}$", $64^{1}/_{2}$", $70^{1}/_{2}$" and $82^{1}/_{2}$" wide use three hooks per panel.

Furnishing Knowledge®

TECHNICAL SPECIFICATIONS

Dual Motor T-Leg Electric-Base Table Operating Capacity Chart

Model Number	Operating Load Capacity
TOGL2448EL	220 lb
TOGL2454EL	215 lb
TOGL2460EL	210 lb
TOGL2466EL	205 lb
TOGL2472EL	200 lb
TOGL3048EL	210 lb
TOGL3054EL	205 lb
TOGL3060EL	200 lb
TOGL3066EL	192 1/2 lb
TOGL3072EL	185 lb
TOGL3648EL	200 lb
TOGL3654EL	192 1/2 lb
TOGL3660EL	185 lb
TOGL3666EL	177 1/2 lb
TOGL3672EL	170 lb
TOGLC3048ELC	180 lb

Dual Motor C-Leg Electric-Base Table Operating Capacity Chart

Model Number	Operating Load Capacity
TOGL2448ELC	220 lb
TOGL2454ELC	215 lb
TOGL2460ELC	210 lb
TOGL2466ELC	205 lb
TOGL2472ELC	200 lb
TOGL3048ELC	210 lb
TOGL3054ELC	205 lb
TOGL3060ELC	200 lb
TOGL3066ELC	192 1/2 lb
TOGL3072ELC	185 lb
TOGL3648ELC	200 lb
TOGL3654ELC	192 1/2 lb
TOGL3660ELC	185 lb
TOGL3666ELC	177 1/2 lb
TOGL3672ELC	170 lb
TOGLC3048ELC	180 lb

Triple Motor C-Leg Electric-Base Square Shoe Table Operating Capacity Chart

Model Number	Operating Load Capacity
TOGLSS244860	260 lb
TOGLSS244866	255 lb
TOGLSS244872	250 lb
TOGLSS244884	240 lb
TOGLSS246048	260 lb
TOGLSS246648	255 lb
TOGLSS247248	250 lb
TOGLSS248448	240 lb
TOGLSS304860	250 lb
TOGLSS304866	245 lb
TOGLSS304872	235 lb
TOGLSS304884	225 lb
TOGLSS306048	250 lb
TOGLSS306648	245 lb
TOGLSS307248	235 lb
TOGLSS308448	225 lb

Furnishing Knowledge®

TECHNICAL SPECIFICATIONS

Toggle Fixed-Base (Model FX)

General
The table consists of two T-bases (centered column on a horizontal foot) supporting a tabletop. The top of the tabletop is 29" from the floor. See page 11 for top sizes.

Base
The base consists of a top plate, column and foot all finished with baked-on 30-sheen powder-coat paint. The top plate is 6-gauge thick steel. The column consists of a $2^{3}/_{8}$" x $4^{3}/_{8}$" rectangular 14-gauge steel tubing with a $^{1}/_{4}$" thick steel plate welded on the bottom and top end. The top plate is attached to the column with four 6 mm bolts. The foot consists of an extruded aluminum component with a nylon toe cap inserted into each end. The foot is attached to the column with four 6 mm bolts. Two $1^{1}/_{2}$" diameter nylon base leveling glides are threaded into the foot.

Tabletop
Tabletops are constructed with $1^{1}/_{8}$" thick 45 lb density particleboard core. The top surface is covered with high-pressure laminate. The bottom surface is covered with a phenolic backing sheet. The perimeter is finished using high impact plastic edging. The tabletop is pre-drilled and attached to each mounting plate using seven #10 x 1" tapping screws.


Wire Trough
The wire trough is an optional accessory which must be ordered separately. Constructed of 18-gauge steel with a powder-coated finish which may be coordinated to match the color of table legs. Screws are provided for attachment to the underside of the tabletop, and tops are pre-drilled for wire trough locations.

Polyester Felt Modesty Panel
Modesty panels are constructed from a sound-absorbing, 100% polyester felt with an acoustic rating of 0.45-0.90 NRC. The panel is $^{1}/_{2}$" thick with a density of .05 lb/ft. Panels are in accordance with ASTM-E84 and achieve a Class A Flame Spread. Standard sizes are $9^{1}/_{4}$" high by $46^{1}/_{2}$", $52^{1}/_{2}$", $58^{1}/_{2}$", $64^{1}/_{2}$", $70^{1}/_{2}$" and $82^{1}/_{2}$" wide.


Mounting Hooks
The mounting hooks are 18-gauge steel and attach underneath the tabletop using two steel screws. Panels $46^{1}/_{2}$" wide use two hooks per panel. Panels $52^{1}/_{2}$", $58^{1}/_{2}$", $64^{1}/_{2}$", $70^{1}/_{2}$" and $82^{1}/_{2}$" wide use three hooks per panel.

Wire Trough Placement on Dual Motor Electric-Base Tables (Model EL & ELC)


For Dual Motor Electric-Base Tables, an optional wire trough can be mounted directly over the cross support tubes. For 36" deep rectangular tables and 120-degree tables, the optional wire trough may also be mounted behind the cross support tubes if desired.

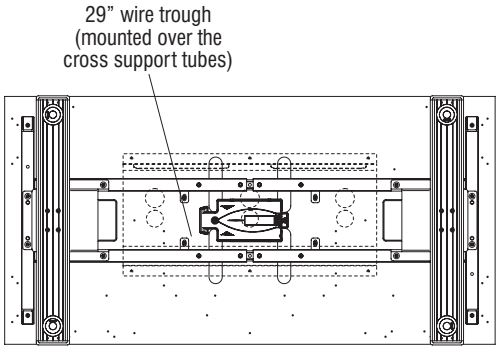

Rectangular Dual Motor Electric-Base Tables, 24"-36" Deep (24" x 48" Model EL shown)

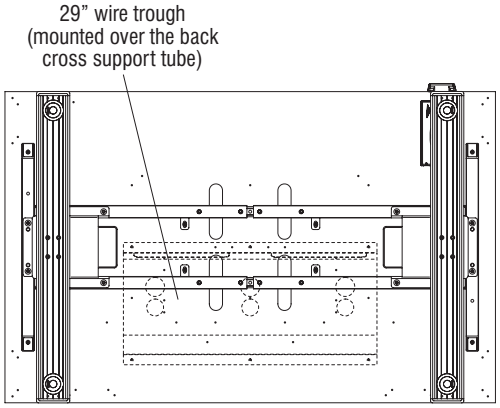

Rectangular Dual Motor Electric-Base Tables, 30"-36" Deep (30" x 48" Model EL shown)

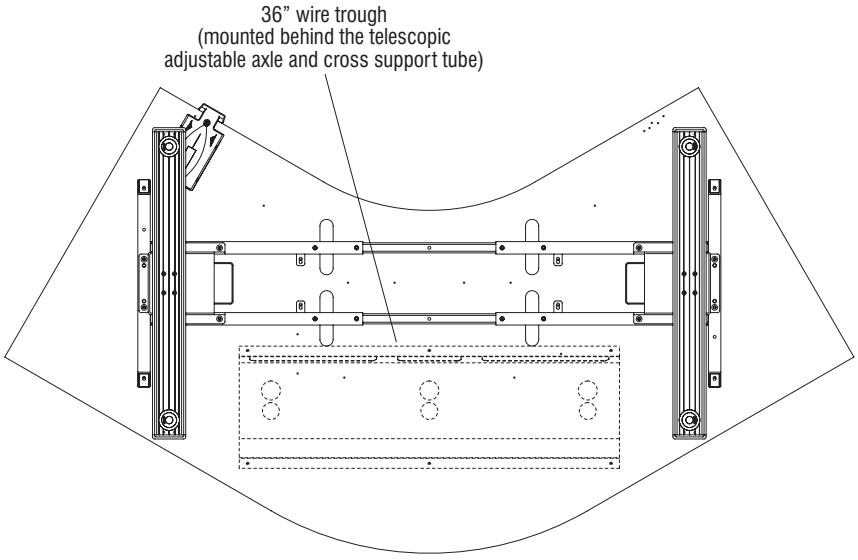


120° Dual Motor Electric-Base Tables, 30" Deep (30" x 48" Model CELC shown)


Furnishing Knowledge®

Wire Trough Placement on Fixed-Base Tables (Model FX)


For 60" and 72" wide Fixed-Base Tables, an optional wire trough can be mounted centered or along the rear edge of the tabletop. The optional wire troughs are not available for 48" wide rectangular tables due to insufficient clearance between the leg mounting plates.

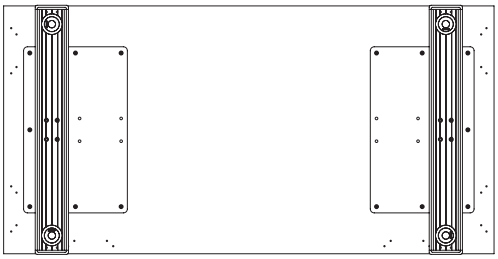

**Rectangular Fixed-Base Tables,
48" Wide (24" x 48" Model FX shown)**

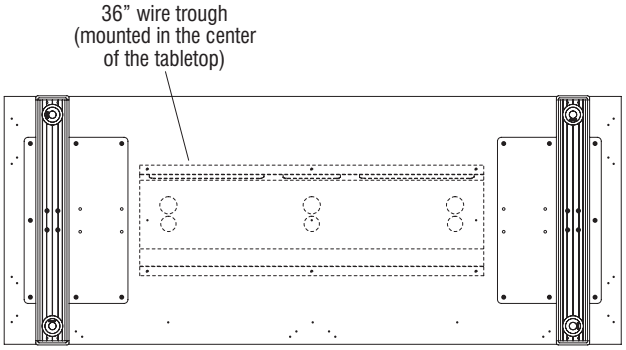

**Rectangular Fixed-Base Tables,
60"-72" Wide (24" x 60" Model FX shown)**

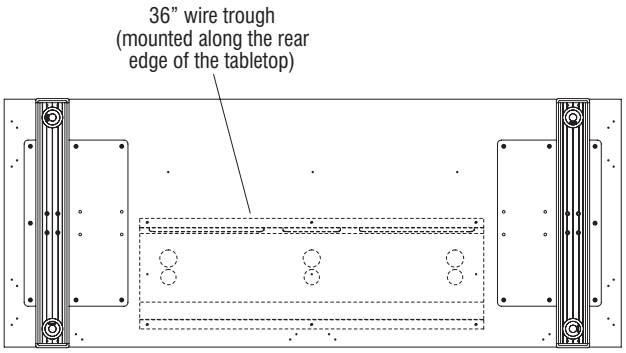


**Rectangular Fixed-Base Tables,
60"-72" Wide (24" x 60" Model FX shown)**

Furnishing Knowledge®

Wire Trough Placement on Triple Motor Electric-Base Tables (Model SS)

For Triple Motor Electric-Base Tables, an optional wire trough can be mounted directly over the cross support tubes on the left- and right-hand side of the table. Reference the chart below to specify wire troughs for all applicable Triple Motor Electric-Base Table models. The tabletops below will have appropriate pre-drilled holes to accept the wire trough listed.

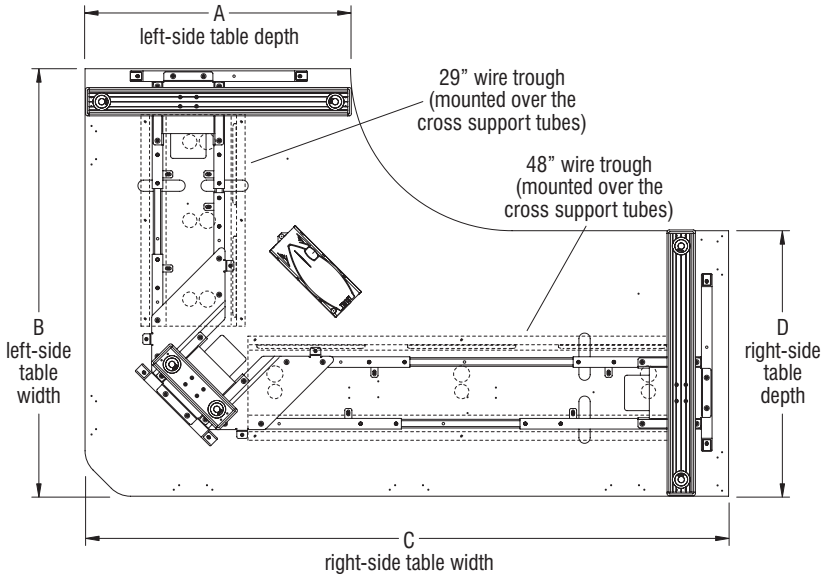

Square Shoe Triple Motor Electric-Base Tables, (30" x 48" x 72" Model SS shown)


Triple Motor C-Leg Electric-Base Square Shoe Table Wire Trough Chart

Model Number	Left-Side Wire Trough	Right-Side Wire Trough
TOGLSS244860	24"	36"
TOGLSS244866	24"	36"
TOGLSS244872	24"	48"
TOGLSS244884	24"	48"
TOGLSS246048	36"	24"
TOGLSS246648	36"	24"
TOGLSS247248	48"	24"
TOGLSS248448	48"	24"
TOGLSS304860	24"	36"
TOGLSS304866	24"	36"
TOGLSS304872	24"	48"
TOGLSS304884	24"	48"
TOGLSS306048	36"	24"
TOGLSS306648	36"	24"
TOGLSS307248	48"	24"
TOGLSS308448	48"	24"

TECHNICAL SPECIFICATIONS

Universal Height-Adjustable Screen on Triple Motor Electric-Base Tables (Model SS)

Reference chart below to specify the privacy screens for all applicable Triple Motor Electric-Base Table models. The tabletops below will have appropriate pre-drilled holes to accept the Universal Height-Adjustable Privacy Screen Model listed.

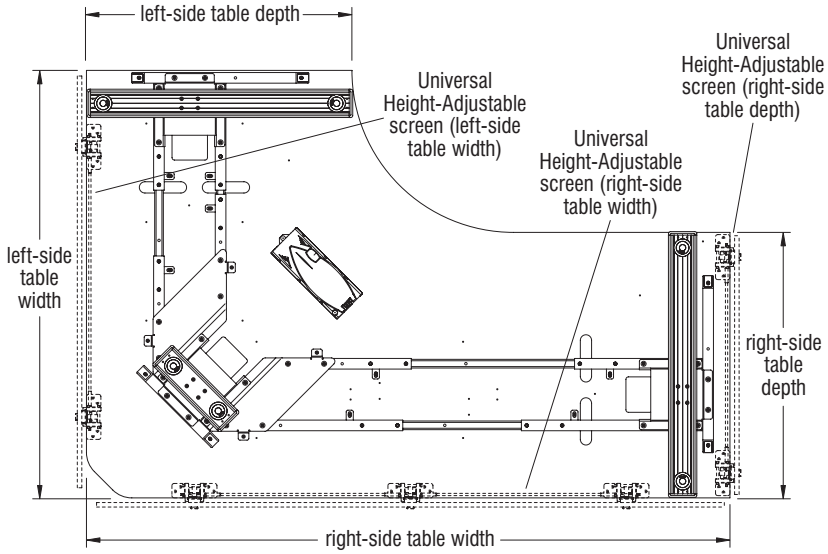


Square Shoe Triple Motor Electric-Base Tables, (30" x 48" x 72" Model SS shown)

Triple Motor C-Leg Electric-Base Square Shoe Table Universal Height-Adjustable Screen Chart


Model Number	Left-Side Table Depth Universal Height-Adjustable Screen	Right-Side Table Depth Universal Height-Adjustable Screen	Left-Side Table Width Universal Height-Adjustable Screen	Right-Side Table Width Universal Height-Adjustable Screen
TOGLSS244860	NA	USPF2324	USPF4624	USPF5824
TOGLSS244866	NA	USPF2324	USPF4624	USPF6424
TOGLSS244872	NA	USPF2324	USPF4624	USPF7024
TOGLSS244884	NA	USPF2324	USPF4624	USPF8224
TOGLSS246048	USPF2324	NA	USPF5824	USPF4624
TOGLSS246648	USPF2324	NA	USPF6424	USPF4624
TOGLSS247248	USPF2324	NA	USPF7024	USPF4624
TOGLSS248448	USPF2324	NA	USPF8224	USPF4624
TOGLSS304860	NA	USPF2924	USPF4624	USPF5824
TOGLSS304866	NA	USPF2924	USPF4624	USPF6424
TOGLSS304872	NA	USPF2924	USPF4624	USPF7024
TOGLSS304884	NA	USPF2924	USPF4624	USPF8224
TOGLSS306048	USPF2924	NA	USPF5824	USPF4624
TOGLSS306648	USPF2924	NA	USPF6424	USPF4624
TOGLSS307248	USPF2924	NA	USPF7024	USPF4624
TOGLSS308448	USPF2924	NA	USPF8224	USPF4624

DIMENSIONS - Dual Motor T-Leg Electric-Base Table (Model EL)


Statement of Line Measurements											
Dimension	Model Number	A Table Depth	B Table Width	C Between Legs	D Between Feet	E Tabletop-to-Leg	F Tabletop-to-Foot	G Tabletop-to-Support	H Foot Size	I Front Edge of Worksurface-to-Leg	J Back Edge of Worksurface-to-Leg
24 x 48"	TOGL2448EL	23.5"	46.5"	35"	33.31"	3.84"	3.45"	1.60"	23.625"	12.9"	12.9"
24 x 54"	TOGL2454EL	23.5"	52.5"	41"	39.31"	3.84"	3.45"	1.60"	23.625"	12.9"	12.9"
24 x 60"	TOGL2460EL	23.5"	58.5"	47"	45.31"	3.84"	3.45"	1.60"	23.625"	12.9"	12.9"
24 x 66"	TOGL2466EL	23.5"	64.5"	53"	51.31"	3.84"	3.45"	1.60"	23.625"	12.9"	12.9"
24 x 72"	TOGL2472EL	23.5"	70.5"	59"	57.31"	3.84"	3.45"	1.60"	23.625"	12.9"	12.9"
30 x 48"	TOGL3048EL	29.5"	46.5"	35"	33.31"	3.84"	3.45"	1.60"	29.625"	15.9"	15.9"
30 x 54"	TOGL3054EL	29.5"	52.5"	41"	39.31"	3.84"	3.45"	1.60"	29.625"	15.9"	15.9"
30 x 60"	TOGL3060EL	29.5"	58.5"	47"	45.31"	3.84"	3.45"	1.60"	29.625"	15.9"	15.9"
30 x 66"	TOGL3066EL	29.5"	64.5"	53"	51.31"	3.84"	3.45"	1.60"	29.625"	15.9"	15.9"
30 x 72"	TOGL3072EL	29.5"	70.5"	59"	57.31"	3.84"	3.45"	1.60"	29.625"	15.9"	15.9"
36 x 48"	TOGL3648EL	35.5"	46.5"	35"	33.31"	3.84"	3.45"	1.60"	29.625"	18.9"	18.9"
36 x 54"	TOGL3654EL	35.5"	52.5"	41"	39.31"	3.84"	3.45"	1.60"	29.625"	18.9"	18.9"
36 x 60"	TOGL3660EL	35.5"	58.5"	47"	45.31"	3.84"	3.45"	1.60"	29.625"	18.9"	18.9"
36 x 66"	TOGL3666EL	35.5"	64.5"	53"	51.31"	3.84"	3.45"	1.60"	29.625"	18.9"	18.9"
36 x 72"	TOGL3672EL	35.5"	70.5"	59"	57.31"	3.84"	3.45"	1.60"	29.625"	18.9"	18.9"
30 x 48"	TOGLC3048ELC	44.16"	80.5"	47"	45.31"	14.86"	14.47"	12.62"	29.625"	16.33"	23.49"

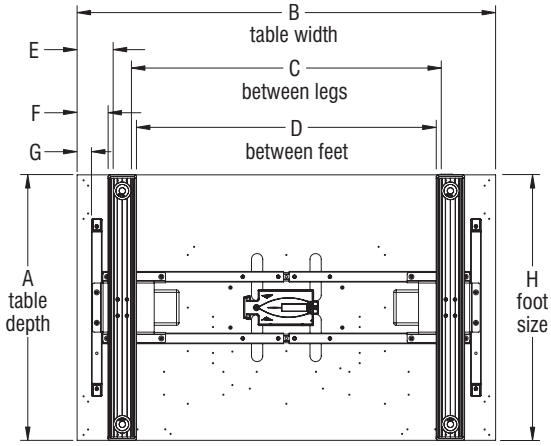


Rectangular Dual Motor T-Leg Electric-Base Table

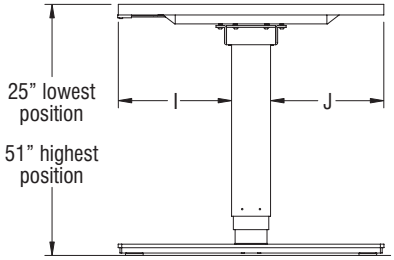

Rectangular Dual Motor T-Leg Electric-Base Table

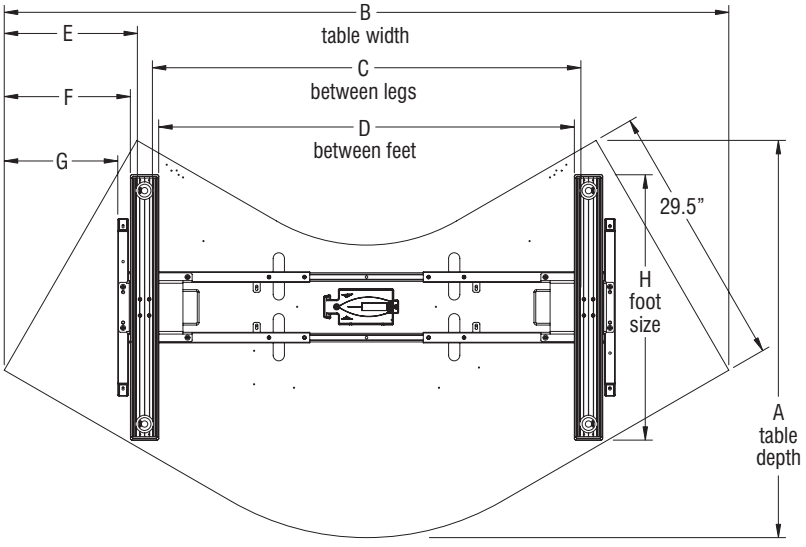


120° Corner Dual Motor T-Leg Electric-Base Table

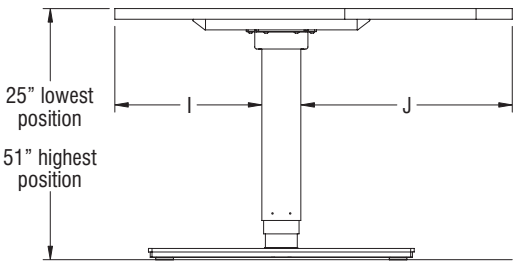


120° Corner Dual Motor T-Leg Electric-Base Table

DIMENSIONS - Dual Motor C-Leg Electric-Base Table (Model ELC)


Statement of Line Measurements											
Dimension	Model Number	A Table Depth	B Table Width	C Between Legs	D Between Feet	E Tabletop-to-Leg	F Tabletop-to-Foot	G Tabletop-to-Support	H Foot Size	I Front Edge of Worksurface-to-Leg	J Back Edge of Worksurface-to-Leg
24 x 48"	TOGL2448ELC	23.5"	46.5"	35"	33.31"	3.84"	3.45"	1.60"	23.625"	12.9"	6.24"
24 x 54"	TOGL2454ELC	23.5"	52.5"	41"	39.31"	3.84"	3.45"	1.60"	23.625"	12.9"	6.24"
24 x 60"	TOGL2460ELC	23.5"	58.5"	47"	45.31"	3.84"	3.45"	1.60"	23.625"	12.9"	6.24"
24 x 66"	TOGL2466ELC	23.5"	64.5"	53"	51.31"	3.84"	3.45"	1.60"	23.625"	12.9"	6.24"
24 x 72"	TOGL2472ELC	23.5"	70.5"	59"	57.31"	3.84"	3.45"	1.60"	23.625"	12.9"	6.24"
30 x 48"	TOGL3048ELC	29.5"	46.5"	35"	33.31"	3.84"	3.45"	1.60"	29.625"	15.9"	9.24"
30 x 54"	TOGL3054ELC	29.5"	52.5"	41"	39.31"	3.84"	3.45"	1.60"	29.625"	15.9"	9.24"
30 x 60"	TOGL3060ELC	29.5"	58.5"	47"	45.31"	3.84"	3.45"	1.60"	29.625"	15.9"	9.24"
30 x 66"	TOGL3066ELC	29.5"	64.5"	53"	51.31"	3.84"	3.45"	1.60"	29.625"	15.9"	9.24"
30 x 72"	TOGL3072ELC	29.5"	70.5"	59"	57.31"	3.84"	3.45"	1.60"	29.625"	15.9"	9.24"
36 x 48"	TOGL3648ELC	35.5"	46.5"	35"	33.31"	3.84"	3.45"	1.60"	29.625"	18.9"	12.24"
36 x 54"	TOGL3654ELC	35.5"	52.5"	41"	39.31"	3.84"	3.45"	1.60"	29.625"	18.9"	12.24"
36 x 60"	TOGL3660ELC	35.5"	58.5"	47"	45.31"	3.84"	3.45"	1.60"	29.625"	18.9"	12.24"
36 x 66"	TOGL3666ELC	35.5"	64.5"	53"	51.31"	3.84"	3.45"	1.60"	29.625"	18.9"	12.24"
36 x 72"	TOGL3672ELC	35.5"	70.5"	59"	57.31"	3.84"	3.45"	1.60"	29.625"	18.9"	12.24"
30 x 48"	TOGLC3048ELC	44.16"	80.5"	47"	45.31"	14.86"	14.47"	12.62"	29.625"	19.68"	20.15"

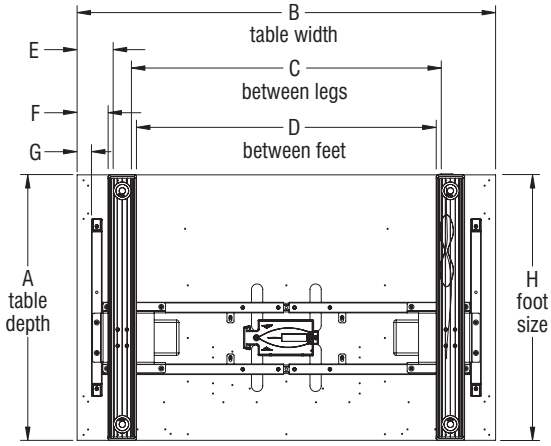


Rectangular Dual Motor C-Leg Electric-Base Table

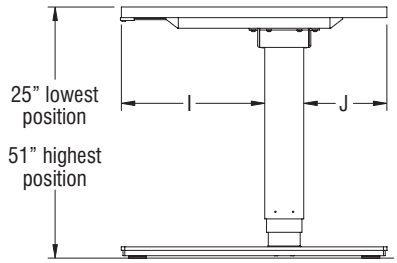

Rectangular Dual Motor C-Leg Electric-Base Table

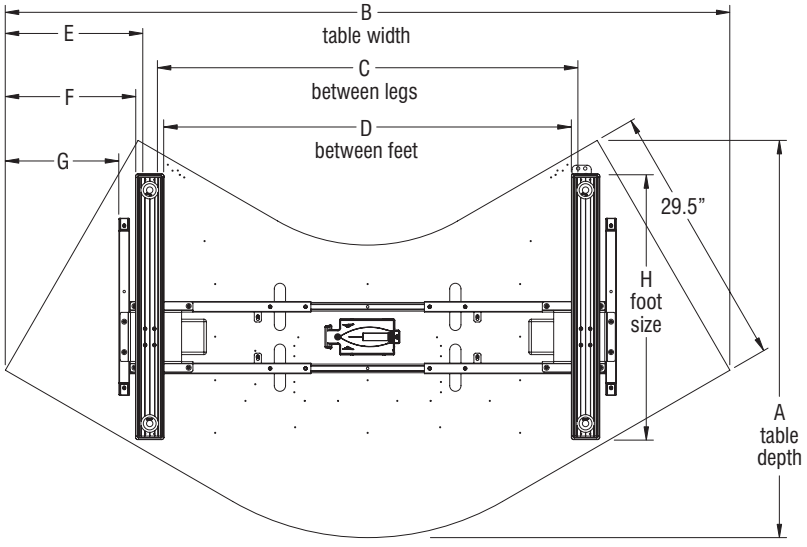


120° Corner Dual Motor C-Leg Electric-Base Table

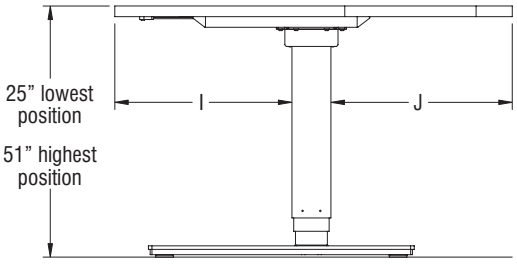


120° Corner Dual Motor C-Leg Electric-Base Table

DIMENSIONS - Triple Motor C-Leg Electric-Base Table (Model SS)

Statement of Line Measurements								
Dimension	Model Number	A Left-Side Table Depth	B Left-Side Table Width	C Right-Side Table Width	D Right-Side Table Depth	E Left-Side Between Legs	F Right-Side Between Legs	G Foot Size
24 x 48 x 60"	TOGLSS244860	23.5"	47.5"	59.5"	23.5"	31"	43"	23.625"
24 x 48 x 66"	TOGLSS244866	23.5"	47.5"	65.5"	23.5"	31"	49"	23.625"
24 x 48 x 72"	TOGLSS244872	23.5"	47.5"	71.5"	23.5"	31"	55"	23.625"
24 x 48 x 84"	TOGLSS244884	23.5"	47.5"	83.5"	23.5"	31"	67"	23.625"
24 x 60 x 48"	TOGLSS246048	23.5"	59.5"	47.5"	23.5"	43"	31"	23.625"
24 x 66 x 48"	TOGLSS246648	23.5"	65.5"	47.5"	23.5"	49"	31"	23.625"
24 x 72 x 48"	TOGLSS247248	23.5"	71.5"	47.5"	23.5"	55"	31"	23.625"
24 x 84 x 48"	TOGLSS248448	23.5"	83.5"	47.5"	23.5"	67"	31"	23.625"
30 x 48 x 60"	TOGLSS304860	29.5"	47.5"	59.5"	29.5"	31"	43"	29.625"
30 x 48 x 66"	TOGLSS304866	29.5"	47.5"	65.5"	29.5"	31"	49"	29.625"
30 x 48 x 72"	TOGLSS304872	29.5"	47.5"	71.5"	29.5"	31"	55"	29.625"
30 x 48 x 84"	TOGLSS304884	29.5"	47.5"	83.5"	29.5"	31"	67"	29.625"
30 x 60 x 48"	TOGLSS306048	29.5"	59.5"	47.5"	29.5"	43"	31"	29.625"
30 x 66 x 48"	TOGLSS306648	29.5"	65.5"	47.5"	29.5"	49"	31"	29.625"
30 x 72 x 48"	TOGLSS307248	29.5"	71.5"	47.5"	29.5"	55"	31"	29.625"
30 x 84 x 48"	TOGLSS308448	29.5"	83.5"	47.5"	29.5"	67"	31"	29.625"

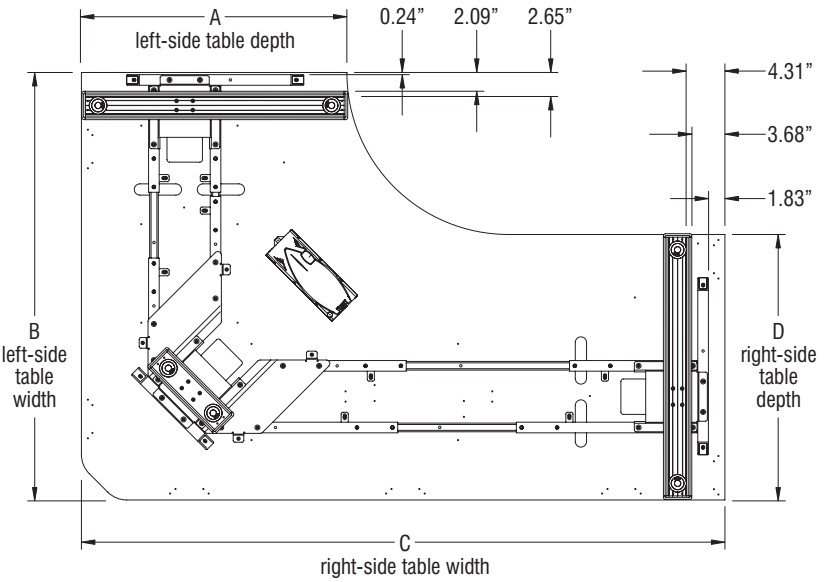


Square Shoe Triple Motor Electric-Base Table

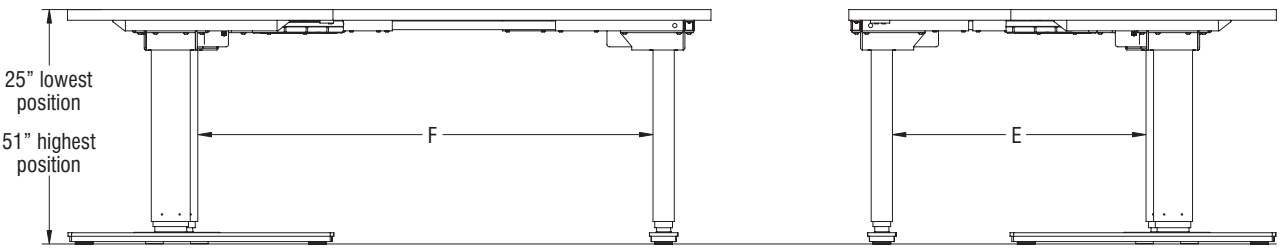


Square Shoe Triple Motor C-Leg Electric-Base Table

DIMENSIONS - Fixed-Base Table (Model FX)

Statement of Line Measurements										
Dimension	Model Number	A Table Depth	B Table Width	C Between Legs	D Between Feet	E Tabletop-to-Leg	F Tabletop-to-Foot	G Foot Size	H Front Edge of Worksurface-to-Leg	I Back Edge of Worksurface-to-Leg
24 x 48"	TOGL2448FX	23.5"	46.5"	35"	34.21"	3.39"	3"	23.625"	9.59"	9.59"
24 x 54"	TOGL2454FX	23.5"	52.5"	41"	40.21"	3.39"	3"	23.625"	9.59"	9.59"
24 x 60"	TOGL2460FX	23.5"	58.5"	47"	46.21"	3.39"	3"	23.625"	9.59"	9.59"
24 x 66"	TOGL2466FX	23.5"	64.5"	53"	52.21"	3.39"	3"	23.625"	9.59"	9.59"
24 x 72"	TOGL2472FX	23.5"	70.5"	59"	58.21"	3.39"	3"	23.625"	9.59"	9.59"
30 x 48"	TOGL3048FX	29.5"	46.5"	35"	34.21"	3.39"	3"	29.625"	12.59"	12.59"
30 x 54"	TOGL3054FX	29.5"	52.5"	41"	40.21"	3.39"	3"	29.625"	12.59"	12.59"
30 x 60"	TOGL3060FX	29.5"	58.5"	47"	46.21"	3.39"	3"	29.625"	12.59"	12.59"
30 x 66"	TOGL3066FX	29.5"	64.5"	53"	52.21"	3.39"	3"	29.625"	12.59"	12.59"
30 x 72"	TOGL3072FX	29.5"	70.5"	59"	58.21"	3.39"	3"	29.625"	12.59"	12.59"
36 x 48"	TOGL3648FX	35.5"	46.5"	35"	34.21"	3.39"	3"	29.625"	15.59"	15.59"
36 x 54"	TOGL3654FX	35.5"	52.5"	41"	40.21"	3.39"	3"	29.625"	15.59"	15.59"
36 x 60"	TOGL3660FX	35.5"	58.5"	47"	46.21"	3.39"	3"	29.625"	15.59"	15.59"
36 x 66"	TOGL3666FX	35.5"	64.5"	53"	52.21"	3.39"	3"	29.625"	15.59"	15.59"
36 x 72"	TOGL3672FX	35.5"	70.5"	59"	58.21"	3.39"	3"	29.625"	15.59"	15.59"

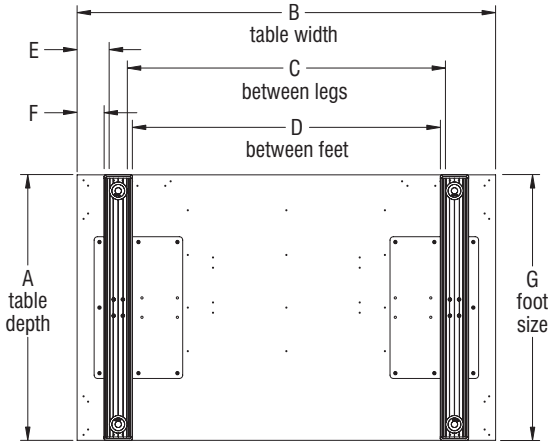

Rectangular Fixed-Base Table

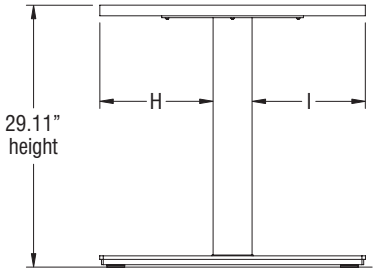


Rectangular Fixed-Base Table


DIMENSIONS - Wire Trough

Wire Trough Width	Dual Motor Table Width
24”	48”
36”	60”
48”	72”


Wire Trough Width	Fixed Table Width
36”	60”
48”	72”

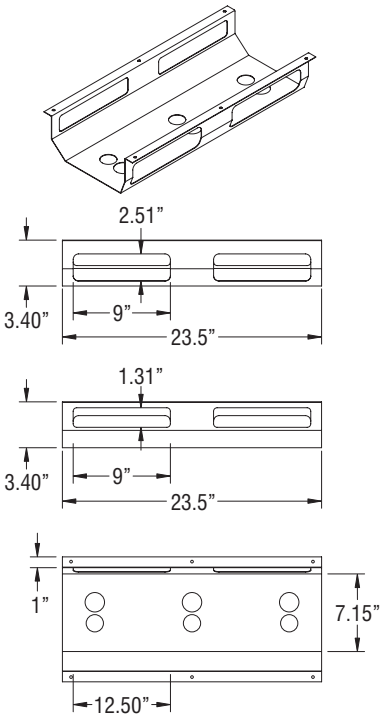

24” Wire Trough

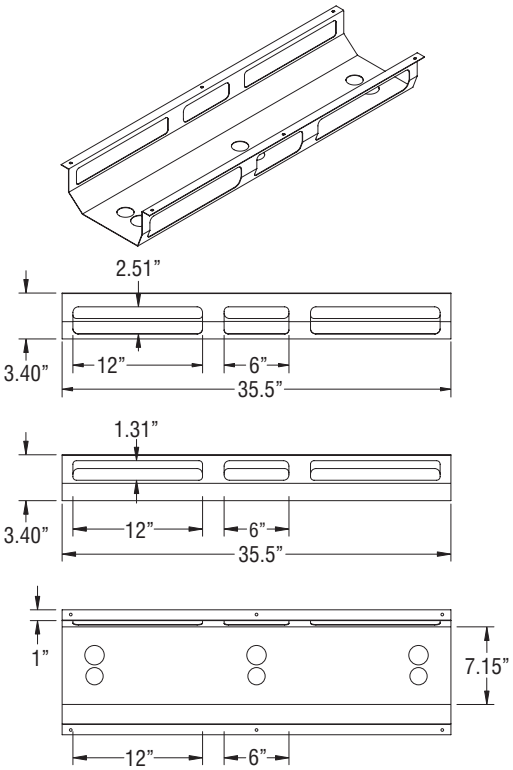

36” Wire Trough

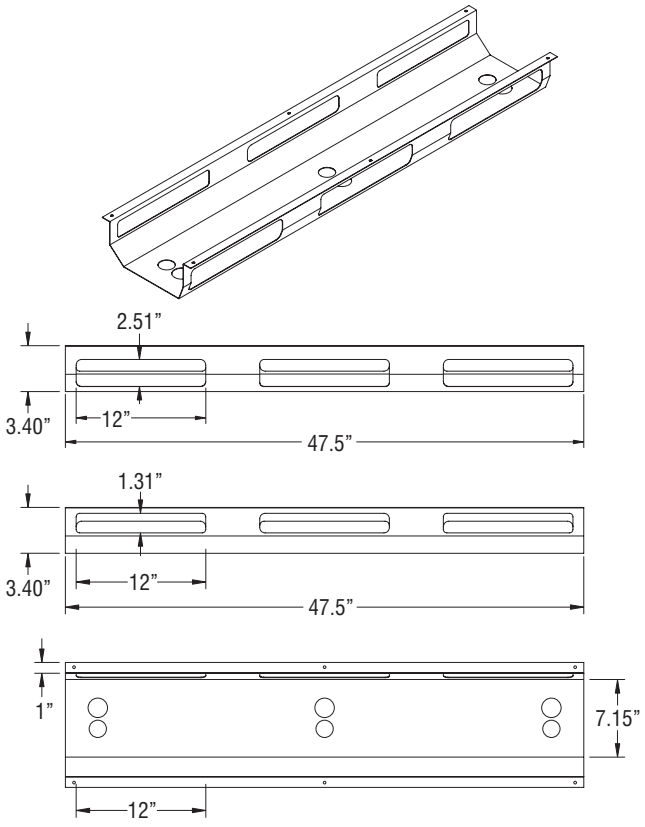


48” Wire Trough

Furnishing Knowledge®


DIMENSIONS - Polyester Felt Modesty Panel

Toggle Rectangular Tables

Reference chart below to specify the polyester felt modesty panel screens for all applicable Toggle Rectangular Table models. The tabletops below will have appropriate pre-drilled holes to accept the polyester felt modesty panel.

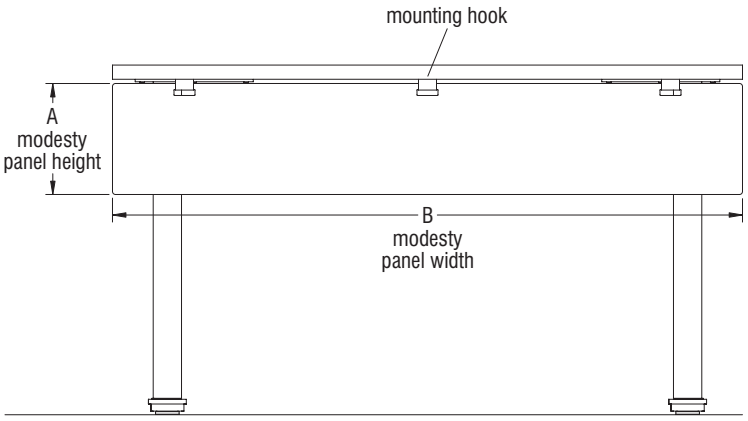

Toggle Rectangular Tables with Polyester Felt Modesty Panel (back view)(30” x 54” Model FX shown)

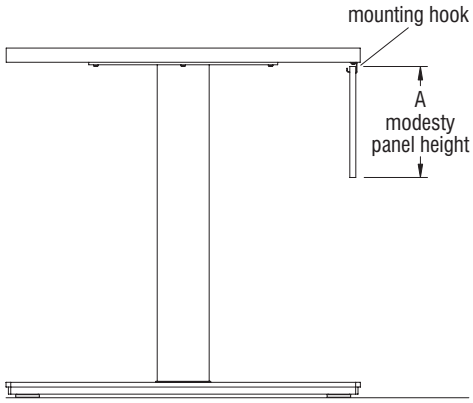


Toggle Rectangular Tables with Polyester Felt Modesty Panel (side view)(30” x 54” Model FX shown)

Polyester Felt Modesty Panel Measurements on Rectangular Tables									
Table Dimension	Model Number	A Modesty Panel Height	B Modesty Panel Width	Number of Hooks		Table Dimension	Model Number	A Modesty Panel Height	B Modesty Panel Width	Number of Hooks
24 x 48”	TOGL2448FX	9.25”	46.5”	2		30 x 66”	TOGL3066EL	9.25”	64.5”	3
24 x 54”	TOGL2454FX	9.25”	52.5”	3		30 x 72”	TOGL3072EL	9.25”	70.5”	3
24 x 60”	TOGL2460FX	9.25”	58.5”	3		36 x 48”	TOGL3648EL	9.25”	46.5”	2
24 x 66”	TOGL2466FX	9.25”	64.5”	3		36 x 54”	TOGL3654EL	9.25”	52.5”	3
24 x 72”	TOGL2472FX	9.25”	70.5”	3		36 x 60”	TOGL3660EL	9.25”	58.5”	3
30 x 48”	TOGL3048FX	9.25”	46.5”	2		36 x 66”	TOGL3666EL	9.25”	64.5”	3
30 x 54”	TOGL3054FX	9.25”	52.5”	3		36 x 72”	TOGL3672EL	9.25”	70.5”	3
30 x 60”	TOGL3060FX	9.25”	58.5”	3		24 x 48”	TOGL2448ELC	9.25”	46.5”	2
30 x 66”	TOGL3066FX	9.25”	64.5”	3		24 x 54”	TOGL2454ELC	9.25”	52.5”	3
30 x 72”	TOGL3072FX	9.25”	70.5”	3		24 x 60”	TOGL2460ELC	9.25”	58.5”	3
36 x 48”	TOGL3648FX	9.25”	46.5”	2		24 x 66”	TOGL2466ELC	9.25”	64.5”	3
36 x 54”	TOGL3654FX	9.25”	52.5”	3		24 x 72”	TOGL2472ELC	9.25”	70.5”	3
36 x 60”	TOGL3660FX	9.25”	58.5”	3		30 x 48”	TOGL3048ELC	9.25”	46.5”	2
36 x 66”	TOGL3666FX	9.25”	64.5”	3		30 x 54”	TOGL3054ELC	9.25”	52.5”	3
36 x 72”	TOGL3672FX	9.25”	70.5”	3		30 x 60”	TOGL3060ELC	9.25”	58.5”	3
24 x 48”	TOGL2448EL	9.25”	46.5”	2		30 x 66”	TOGL3066ELC	9.25”	64.5”	3
24 x 54”	TOGL2454EL	9.25”	52.5”	3		30 x 72”	TOGL3072ELC	9.25”	70.5”	3
24 x 60”	TOGL2460EL	9.25”	58.5”	3		36 x 48”	TOGL3648ELC	9.25”	46.5”	2
24 x 66”	TOGL2466EL	9.25”	64.5”	3		36 x 54”	TOGL3654ELC	9.25”	52.5”	3
24 x 72”	TOGL2472EL	9.25”	70.5”	3		36 x 60”	TOGL3660ELC	9.25”	58.5”	3
30 x 48”	TOGL3048EL	9.25”	46.5”	2		36 x 66”	TOGL3666ELC	9.25”	64.5”	3
30 x 54”	TOGL3054EL	9.25”	52.5”	3		36 x 72”	TOGL3672ELC	9.25”	70.5”	3
30 x 60”	TOGL3060EL	9.25”	58.5”	3						


DIMENSIONS - Polyester Felt Modesty Panel

Toggle 120° Corner Tables

Reference chart below to specify the polyester felt modesty panel screens for all applicable Toggle 120° Corner Table models. The tabletops below will have appropriate pre-drilled holes to accept the polyester felt modesty panel.

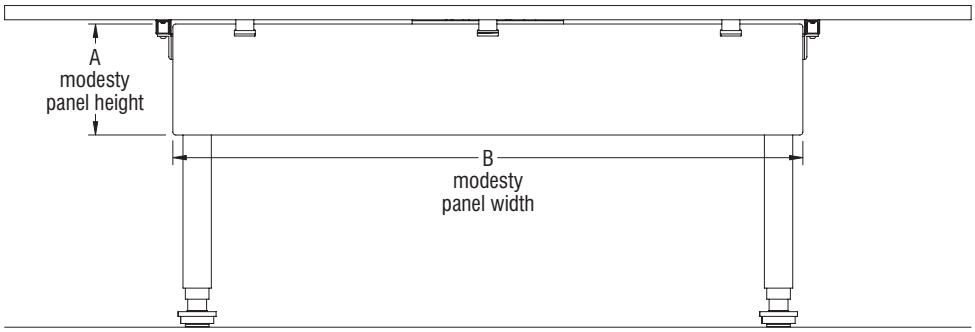

Toggle 120° Corner Tables with Polyester Felt Modesty Panel (back view)(30" x 48" Model EL shown)

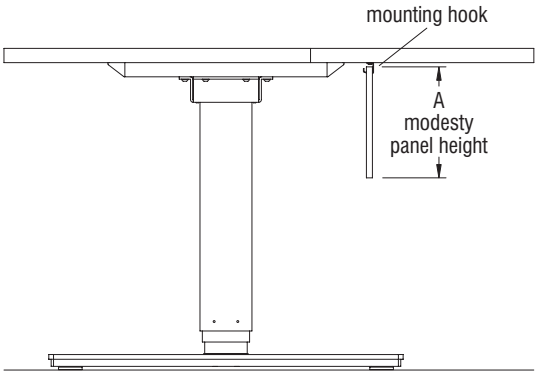


Toggle 120° Corner Tables with Polyester Felt Modesty Panel (side view)(30" x 48" Model EL shown)

Polyester Felt Modesty Panel Measurements on 120° Corner Tables				
Table Dimension	Model Number	A Modesty Panel Height	B Modesty Panel Width	Number of Hooks
30 x 48"	TOGLC3048EL	9.25"	52.5"	3
30 x 48"	TOGLC3048ELC	9.25"	52.5"	3


DIMENSIONS - Polyester Felt Modesty Panel

Toggle Square Shoe Tables

Reference chart below to specify the polyester felt modesty panel screens for all applicable Toggle Square Shoe Table models. The tabletops below will have appropriate pre-drilled holes to accept the polyester felt modesty panel.

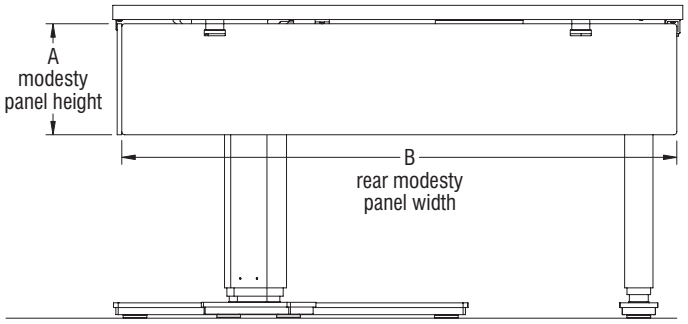

Toggle Square Shoe Tables with Polyester Felt Modesty Panel (back view)(30" x 48" Model EL shown)

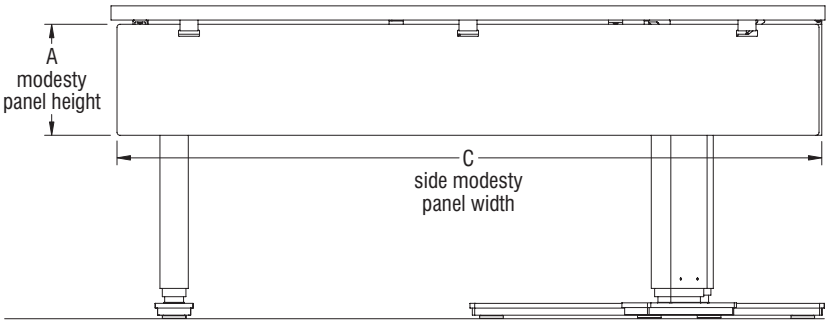


Toggle Square Shoe Tables with Polyester Felt Modesty Panel (side view)(30" x 48" Model EL shown)


Polyester Felt Modesty Panel Measurements on Square Shoe Tables						
Table Dimension	Model Number	A Modesty Panel Height	B Rear Modesty Panel Width	Number of Hooks for Rear Modesty Panel	C Side Modesty Panel Width	Number of Hooks for Side Modesty Panel
24 x 48 x 60"	TOGLSS244860	9.25"	46.5"	2	58.5"	3
24 x 48 x 66"	TOGLSS244866	9.25"	46.5"	2	64.5"	3
24 x 48 x 72"	TOGLSS244872	9.25"	46.5"	2	70.5"	3
24 x 48 x 84"	TOGLSS244884	9.25"	46.5"	2	82.5"	3
24 x 60 x 48"	TOGLSS246048	9.25"	58.5"	3	46.5"	2
24 x 66 x 48"	TOGLSS246648	9.25"	64.5"	3	46.5"	2
24 x 72 x 48"	TOGLSS247248	9.25"	70.5"	3	46.5"	2
24 x 84 x 48"	TOGLSS248448	9.25"	82.5"	3	46.5"	2
30 x 48 x 60"	TOGLSS304860	9.25"	46.5"	2	58.5"	3
30 x 48 x 66"	TOGLSS304866	9.25"	46.5"	2	64.5"	3
30 x 48 x 72"	TOGLSS304872	9.25"	46.5"	2	70.5"	3
30 x 48 x 84"	TOGLSS304884	9.25"	46.5"	2	82.5"	3
30 x 60 x 48"	TOGLSS306048	9.25"	58.5"	3	46.5"	2
30 x 66 x 48"	TOGLSS306648	9.25"	64.5"	3	46.5"	2
30 x 72 x 48"	TOGLSS307248	9.25"	70.5"	3	46.5"	2
30 x 84 x 48"	TOGLSS308448	9.25"	82.5"	3	46.5"	2

STATEMENT OF LINE

Toggle Dual Motor T-Leg Electric-Base Table (Model EL)

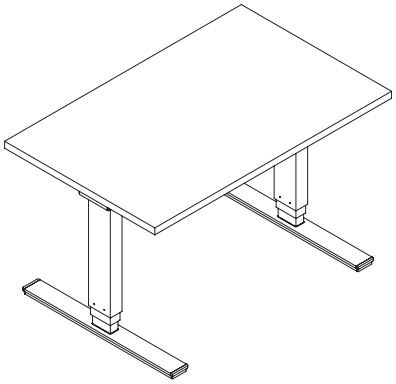


TOGLEL

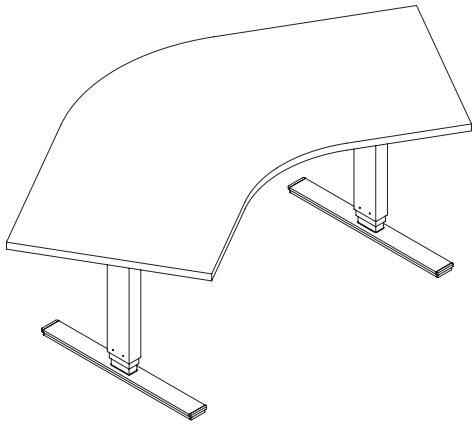


TOGLCEL

Toggle Dual Motor C-Leg Electric-Base Table (Model ELC)

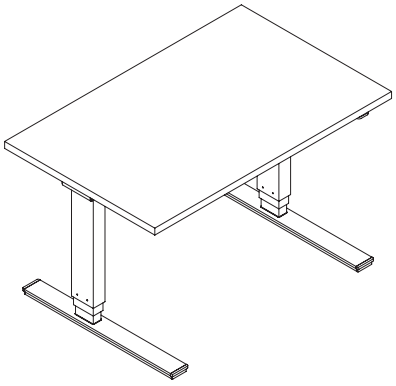


TOGLELC

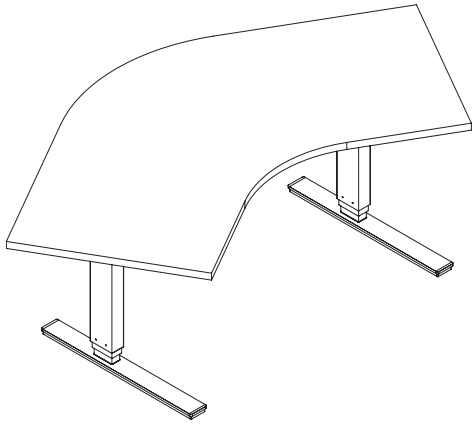


TOGLCELC

Toggle Fixed-Base Table (Model FX)

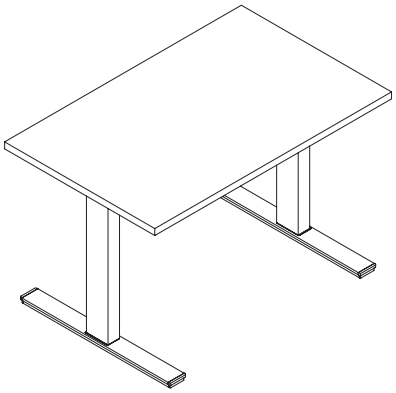

TOGLFX

Toggle Triple Motor C-Leg Electric-Base Table (Model SS)

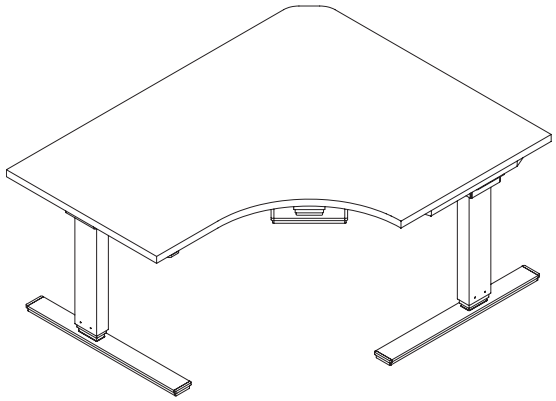

TOGLSS

1330 Bellevue Street • P.O. Box 8100 • Green Bay, WI 54308-8100 • 1-800-424-2432 • www.ki.com
© 2020 Krueger International, Inc. All Rights Reserved • Code KI-TS-000020R8/KI/PDF/0620

Furnishing Knowledge®

PRODUCT SPECIFICATIONS

Toggle™ Tables

Models SM, EL & FX

April 2017

TECHNICAL SPECIFICATIONS





Toggle Single Motor "Electric" Base, Model (SM)

General

The table shall consist of two adjustable height T-bases (centered column on a horizontal foot) attached to a worksurface support that spans the two bases and supports a worksurface. One leg is motorized (the drive leg) and connected via a telescopic adjustable axle to a second non-motorized leg (the follower leg). The top of the worksurface shall adjust between 27 1/2" and 47" from the floor by means of electric controls that can be located at either end of the table.

Base

The base shall consist of a column assembly and foot, both finished with baked-on 30 sheen powder-coat paint. The column assembly shall consist of an outer member and an inner member. The outer member shall be 2" x 4" rectangular 14-gauge steel tubing with an 11-gauge steel plate welded on the top end. The inner member shall be 1 1/2" x 3 1/2" rectangular 14-gauge steel tubing with a 1/4" steel plate welded on the bottom end. An 11-gauge formed steel motor housing is welded to the drive leg member for strength. The drive axle consists of an extruded aluminium tube with cast bushings and a steel hex rod to connect the motor axle to the follower leg. The foot shall consist of an extruded aluminum component with a nylon toe cap inserted into each end. The foot is attached to the column with four 6mm bolts. Two 1 1/2" diameter nylon base leveling glides and threaded into the foot.

Worksurface Support

The worksurface lateral support shall be 1" x 2" rectangular 14-gauge steel tubing attached to each leg column with 6mm cap screws. End supports are 1" x 1", 14-gauge steel tube attached to the leg column with two 8mm button head machine screws. An extruded aluminum cross member connects each leg assembly for stability.

Worksurface

Worksurfaces shall be constructed with 1 1/8" thick 45 lb. density particle core board. The top surface shall be covered with high-pressure laminate. The bottom surface shall be covered with a phenolic backing sheet. The perimeter shall be finished using high impact plastic edging. The worksurface shall be pre-drilled and attached to the bases using eight #10 x 1" tapping screws.

Control Box

The control box comes standard with an integrated two button controller. Tables also ship standard with a more compact corded two-button remote control switch. This allows two switch options for every customer. All table controllers come standard with programmable container/shelf stop, and ISP (Intelligent System Protection). The stand-by power consumption is 0.3 watts. Refer to "Toggle Control Unit Product Specifications" (KI-62686) for more details.

Toggle Dual Motor "Electric" Base, Model (EL)

General

The table shall consist of two adjustable height T-bases (centered column on a horizontal foot) attached to a worksurface support that spans the two bases and supports a worksurface. The top of the worksurface shall adjust between 26.00" and 52.00" from the floor by means of electric controls that can be located at either end of the table.

TECHNICAL SPECIFICATIONS (CONTINUED)

Base
The base shall consist of a column assembly and foot both finished with baked-on 30 sheen powder-coat paint. The column assembly shall consist of an outer member, an intermediate member and an inner member. The outer member shall be 2 3/8" x 4 3/8" rectangular 14-gauge steel tubing with a 1/4" steel plate welded on the top end. The intermediate member shall be 2" x 4" rectangular 14-gauge steel tubing. The inner member shall be 1 1/2" x 3 1/2" rectangular 14-gauge steel tubing with a 1/4" steel plate welded on the bottom end. A 6-gauge formed steel motor housing is welded to each outer leg member for strength. The foot shall consist of an extruded aluminum component with a nylon toe cap inserted into each end. The foot shall be attached to the column with four 6mm bolts. Two 1 1/2" diameter nylon base leveling glides shall be threaded into the foot.

Worksurface Support
The worksurface support shall be 14-gauge 1" x 1" steel tubing attached to each leg column with 6mm bolts. An 11-gauge U-shaped cross member connects each leg assembly for stability.

Worksurface
Worksurfaces shall be constructed with 1 1/8" thick 45 lb. density particle core board. The top surface shall be covered with high-pressure laminate. The bottom surface shall be covered with a phenolic backing sheet. The perimeter shall be finished using high impact plastic edging. The worksurface shall be pre-drilled and attached to the bases using eight #10 x 1" tapping screws.

Control Box
The control box comes standard with an integrated two button controller. Tables also ship standard with a more compact corded two-button remote control switch. This allows two switch options for every customer. All table controllers come standard with programmable container/shelf stop, and ISP (Intelligent System Protection). The stand-by power consumption is 0.3 watts. Refer to "Toggle Control Unit Product Specifications" (KI-62686) for more details.

Toggle "Fixed" Base, Model (FX)

General
The table shall consist of two T-bases (centered column on a horizontal foot) supporting a worksurface. The top of the worksurface shall be 29" from the floor. See final page for top sizes.

Base
The base shall consist of a top plate, column and foot all finished with baked-on 30 sheen powder-coat paint. The top plate shall be 6-gauge thick steel. The column shall be 2 3/8" x 4 3/8" rectangular 14-gauge steel tubing with a 1/4" steel plate welded on the bottom and top end. The top plate shall be attached to the column with four 6mm bolts. The foot shall consist of an extruded aluminum component with a nylon toe cap inserted into each end. The foot shall be attached to the column with four 6mm bolts. Two 1 1/2" diameter nylon base leveling glides shall be threaded into the foot.

Worksurface
Worksurfaces shall be constructed with 1 1/8" thick 45 lb. density particle core board. The top surface shall be covered with high-pressure laminate. The bottom surface shall be covered with a phenolic backing sheet. The perimeter shall be finished using high impact plastic edging. The worksurface shall be pre-drilled and attached to each mounting plate using seven #10 x 1" tapping screws.

DIMENSIONS

Dimensions	Model	Space Between Legs	Space Between Feet	Foot Sizes
24 x 48"	Single Motor (SM)	36.21"	35.03"	23.625"
24 x 60"	Single Motor (SM)	48.21"	47.03"	23.625"
24 x 72"	Single Motor (SM)	60.21"	59.03"	23.625"
30 x 48"	Single Motor (SM)	36.21"	35.03"	29.625"
30 x 60"	Single Motor (SM)	48.21"	47.03"	29.625"
30 x 72"	Single Motor (SM)	60.21"	59.03"	29.625"
36 x 48"	Single Motor (SM)	36.21"	35.03"	29.625"
36 x 60"	Single Motor (SM)	48.21"	47.03"	29.625"
36 x 72"	Single Motor (SM)	60.21"	59.03"	29.625"
30 x 48"	Single Motor (SM) 120-Degree Corner	48.37"	47.19"	29.625"
24 x 48"	Dual Motor (EL)	35.66"	34.21"	23.625"
24 x 60"	Dual Motor (EL)	47.66"	46.21"	23.625"
24 x 72"	Dual Motor (EL)	59.66"	58.21"	23.625"
30 x 48"	Dual Motor (EL)	35.66"	34.21"	29.625"
30 x 60"	Dual Motor (EL)	47.66"	46.21"	29.625"
30 x 72"	Dual Motor (EL)	59.66"	58.21"	29.625"
36 x 48"	Dual Motor (EL)	35.66"	34.21"	29.625"
36 x 60"	Dual Motor (EL)	47.66"	46.21"	29.625"
36 x 72"	Dual Motor (EL)	59.66"	58.21"	29.625"
30 x 48"	Dual Motor (EL) 120-Degree Corner	47.66"	46.21"	29.625"
24 x 48"	Fixed (FX)	35"	34.21"	23.625"
24 x 60"	Fixed (FX)	47"	46.21"	23.625"
24 x 72"	Fixed (FX)	59"	58.21"	23.625"
30 x 48"	Fixed (FX)	35"	34.21"	29.625"
30 x 60"	Fixed (FX)	47"	46.21"	29.625"
30 x 72"	Fixed (FX)	59"	58.21"	29.625"
36 x 48"	Fixed (FX)	35"	34.21"	29.625"
36 x 60"	Fixed (FX)	47"	46.21"	29.625"
36 x 72"	Fixed (FX)	59"	58.21"	29.625"

Foot sizes are 23.625" for the 24" tops and 29.625" for the 30" and 36" deep tops.

Table Operating Capacity Chart Toggle Single Motor


Model Number	Operating Load Capacity
TOGL2448SM	110 lbs.
TOGL2460SM	100 lbs.
TOGL2472SM	90 lbs.
TOGL3048SM	100 lbs.
TOGL3060SM	90 lbs.
TOGL3072SM	75 lbs.
TOGL3648SM	90lbs.
TOGL3660SM	75 lbs.
TOGL3672SM	60 lbs.
TOGLC3048SM	70 lbs.

Table Operating Capacity Chart Toggle Dual Motor


Model Number	Operating Load Capacity
TOGL2448EL	220 lbs.
TOGL2460EL	210 lbs.
TOGL2472EL	200 lbs.
TOGL3048EL	210 lbs.
TOGL3060EL	200 lbs.
TOGL3072EL	185 lbs.
TOGL3648EL	200 lbs.
TOGL3660EL	185 lbs.
TOGL3672EL	170 lbs.
TOGLC3048EL	180 lbs.

STATEMENT OF LINE


Toggle Single Motor “Electric” Base, Model (SM)

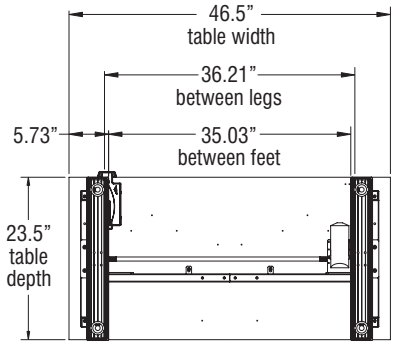


24 x 48

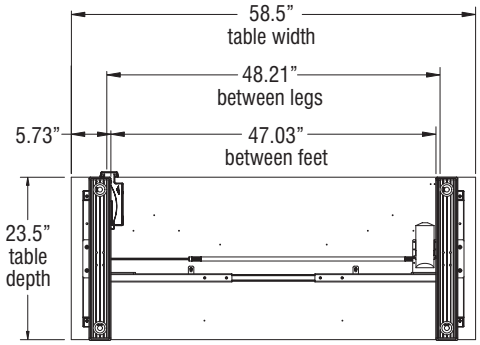


24 x 60

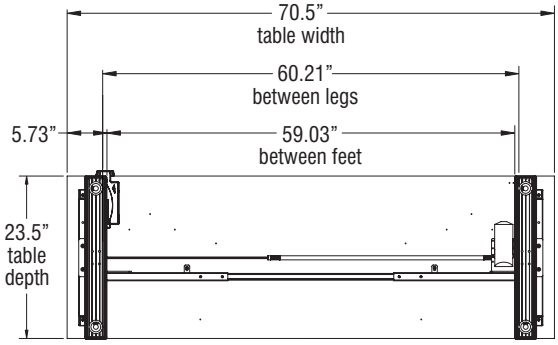


24 x 72




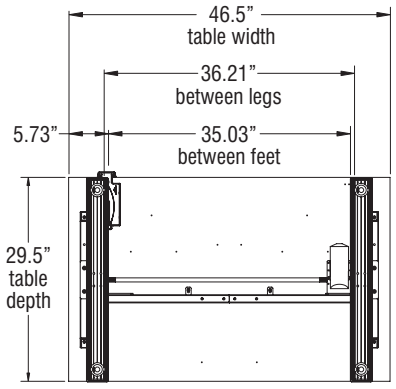


30 x 48

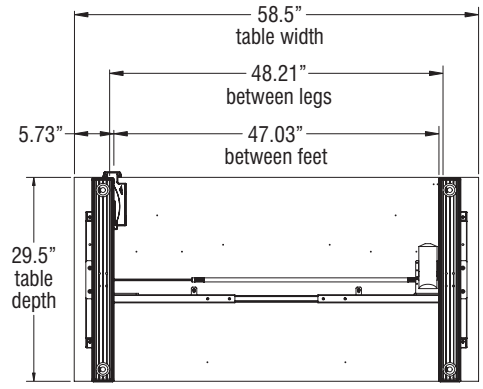

30 x 60

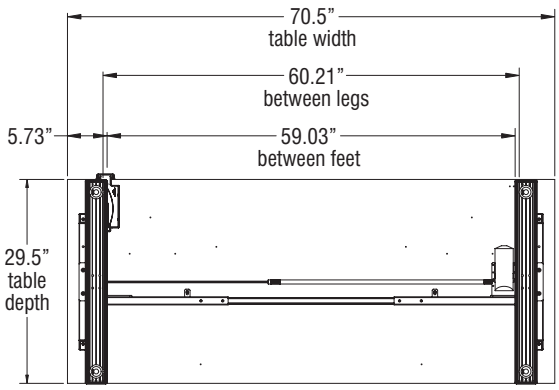


30 x 72




Furnishing Knowledge®

STATEMENT OF LINE (CONTINUED)


Toggle Single Motor “Electric” Base, Model (SM)

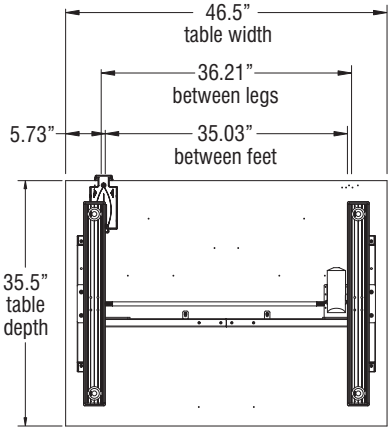


36 x 48

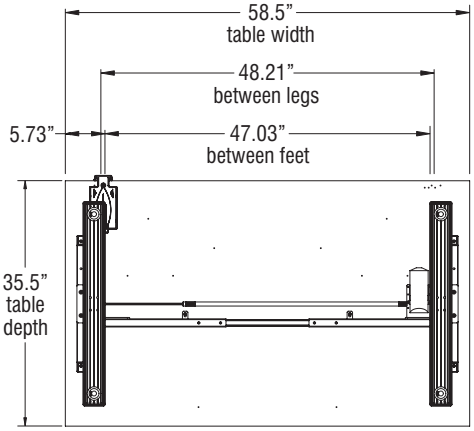


36 x 60

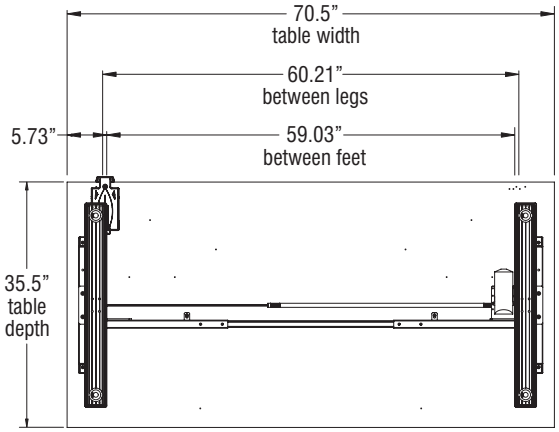


36 x 72

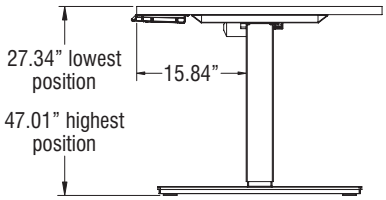

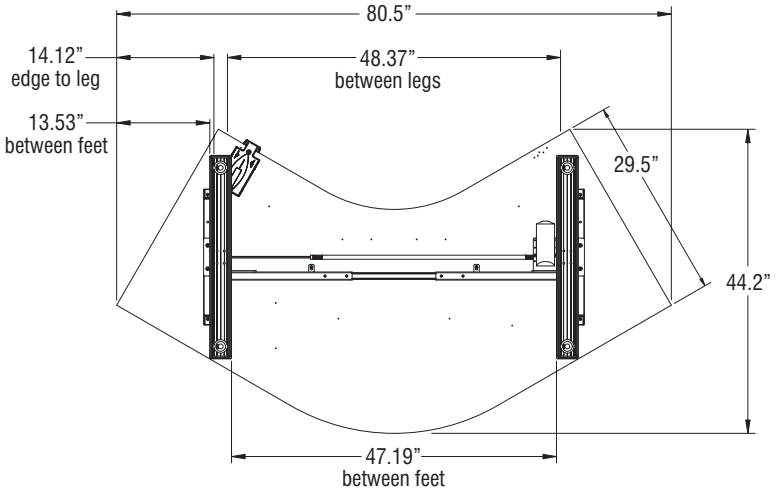


30 x 48 - 120-Degree Corner

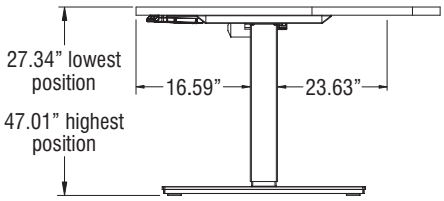


Furnishing Knowledge®

STATEMENT OF LINE (CONTINUED)


Toggle Dual Motor “Electric” Base, Model (EL)

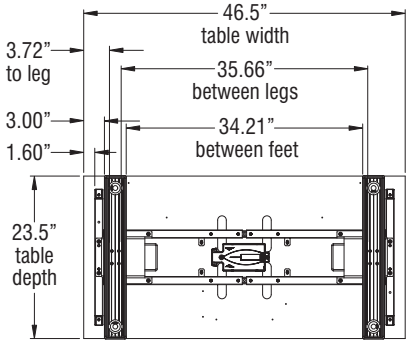


24 x 48

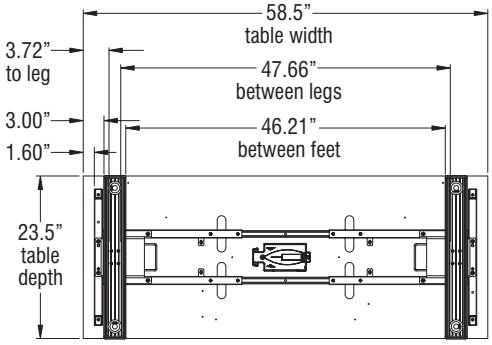


24 x 60

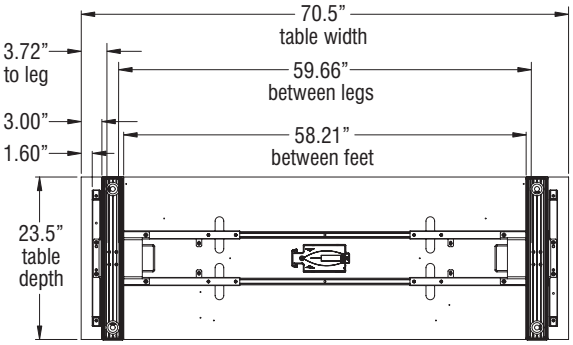


24 x 72




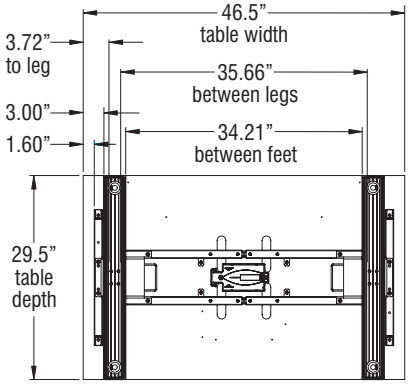


30 x 48

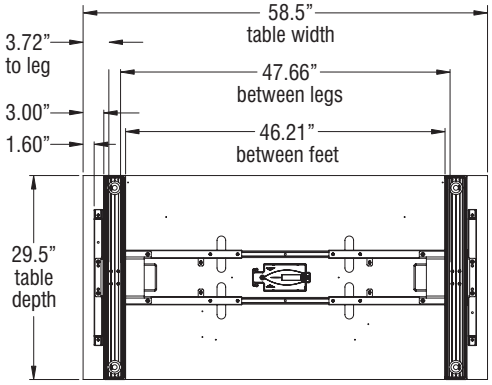

30 x 60

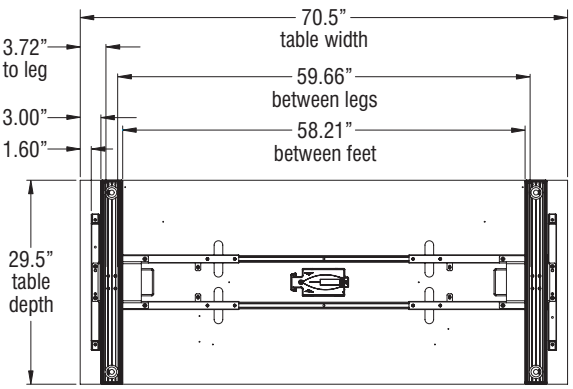


30 x 72




Furnishing Knowledge®

STATEMENT OF LINE (CONTINUED)


Toggle Dual Motor “Electric” Base, Model (EL)

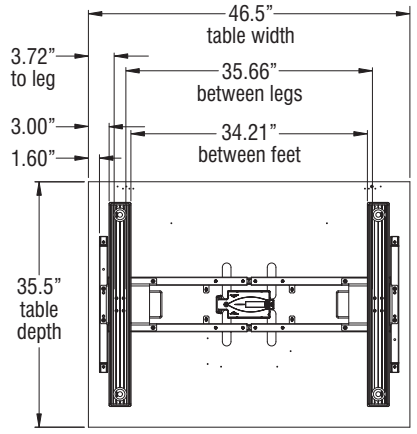


36 x 48

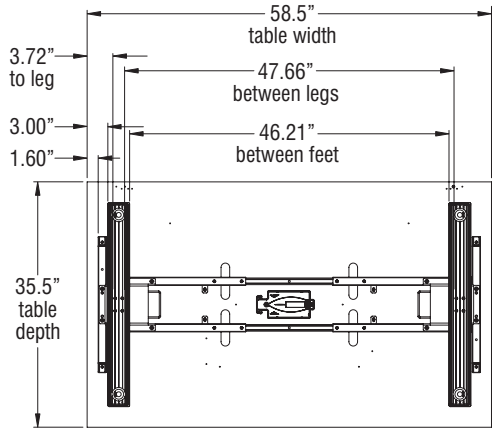


36 x 60

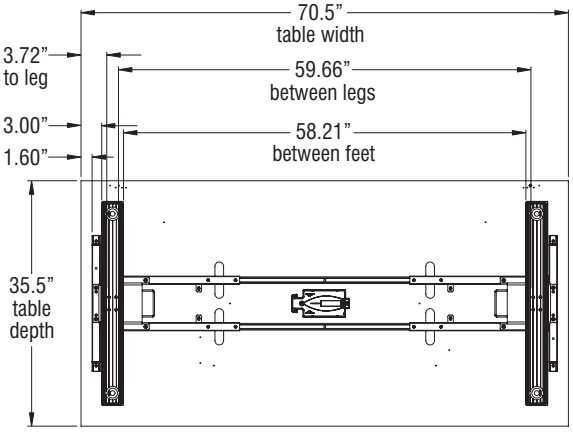


36 x 72

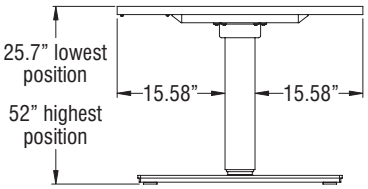

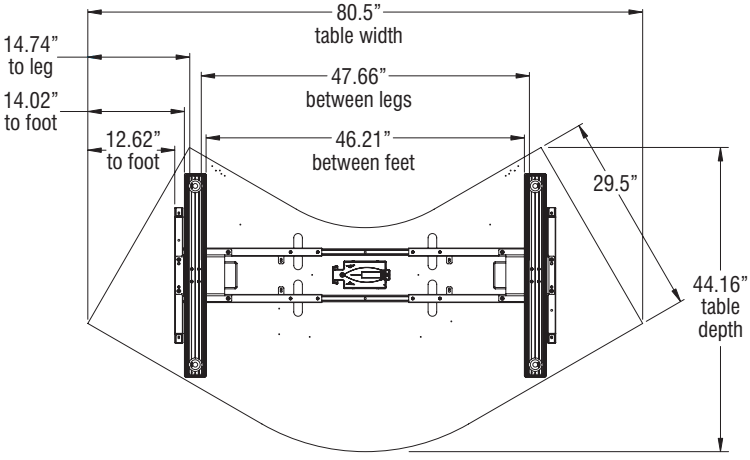


30 x 48 - 120-Degree Corner

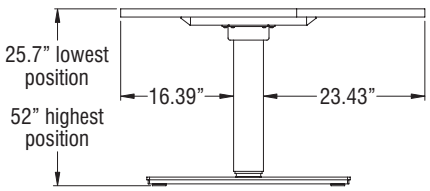


Furnishing Knowledge®

STATEMENT OF LINE (CONTINUED)


Toggle “Fixed” Base, Model (FX)

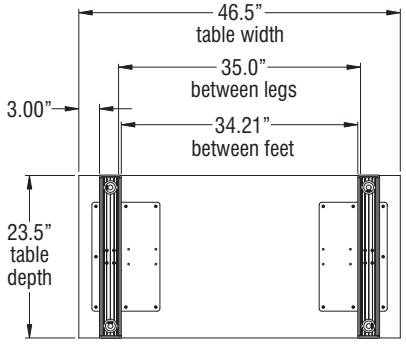


24 x 48

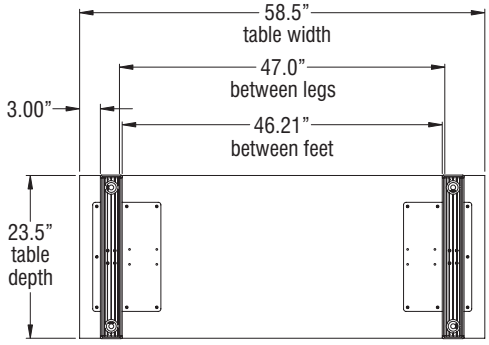


24 x 60

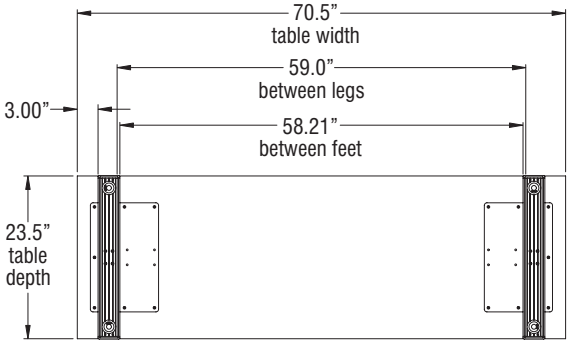


24 x 72




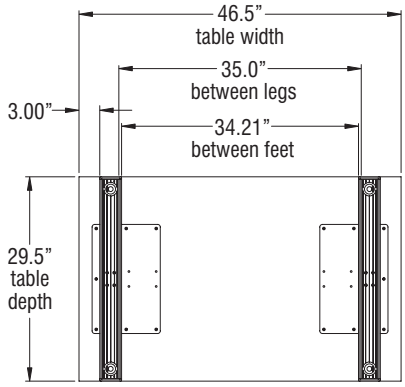


30 x 48

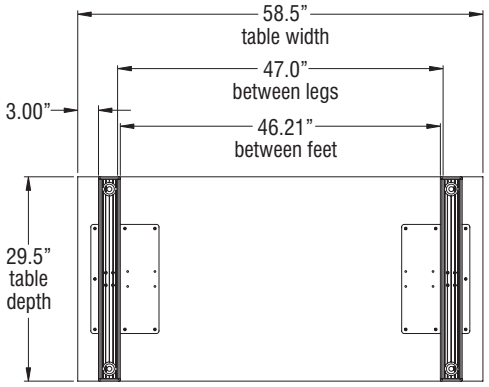

30 x 60

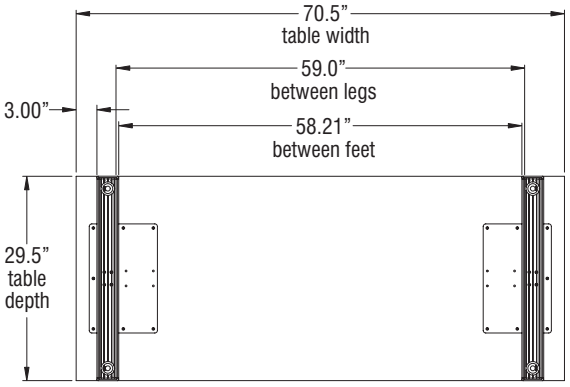


30 x 72




Furnishing Knowledge®

STATEMENT OF LINE (CONTINUED)


Toggle “Fixed” Base, Model (FX)

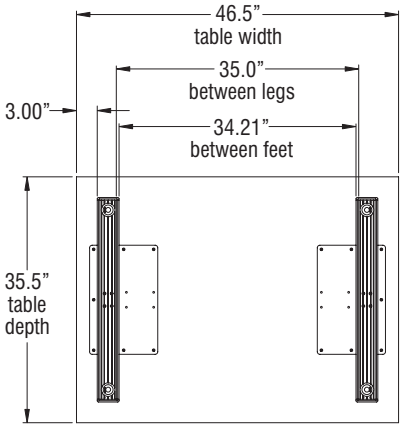


36 x 48

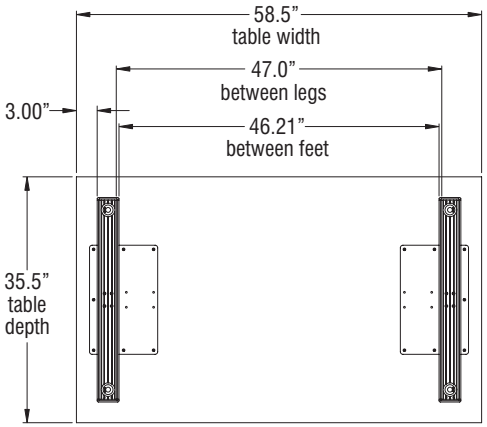

36 x 60

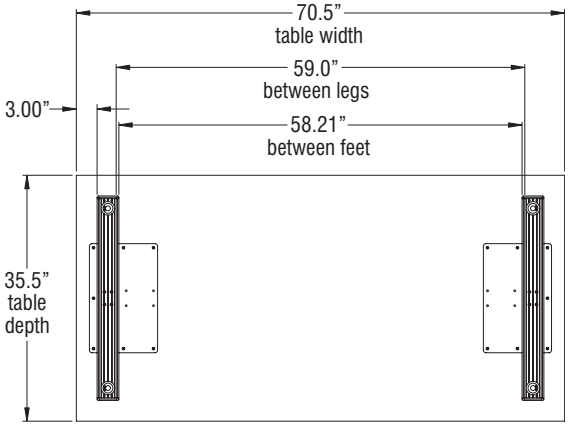

36 x 72



© 2017 Krueger International, Inc. All Rights Reserved • Code KI-TS-000020R1/KI/PDF/0417

Furnishing Knowledge®

PRODUCT SPECIFICATIONS

Toggle™ Tables

Models EL & FX

July 2018



TECHNICAL SPECIFICATIONS

Toggle Dual Motor Electric-Base (Model EL)

General
The table consists of two adjustable height T-bases (centered column on a horizontal foot) attached to a worksurface support that spans the two bases and supports a worksurface. The top of the worksurface adjusts between 26" and 52" from the floor by means of electric controls that can be located at either end of the table.

Base
The base consists of a column assembly and foot both finished with baked-on 30 sheen powder-coat paint. The column assembly consists of an outer member, an intermediate member and an inner member. The outer member consists of a 2 3/8" x 4 3/8" rectangular 14-gauge steel tubing with a 1/4" steel plate welded on the top end. The intermediate member consists of a 2" x 4" rectangular 14-gauge steel tubing. The inner member consists of a 1 1/2" x 3 1/2" rectangular 14-gauge steel tubing with a 1/4" steel plate welded on the bottom end. A 6-gauge formed steel motor housing is welded to each outer leg member for strength. The foot consists of an extruded aluminum component with a nylon toe cap inserted into each end. The foot is attached to the column with four 6mm bolts. Two 1 1/2" diameter nylon base leveling glides are threaded into the foot.

Worksurface Support
The worksurface support consists of a 14-gauge 1" x 1" steel tubing attached to each leg column with 6mm bolts. An 11-gauge U-shaped cross member connects each leg assembly for stability.

Worksurface
Worksurfaces are constructed with 1 1/8" thick 45 lb. density particle core board. The top surface is covered with high-pressure laminate. The bottom surface is covered with a phenolic backing sheet. The perimeter is finished using high impact plastic edging. The worksurface is pre-drilled and attached to the bases using eight #10 x 1" tapping screws.

Control Box
The control box comes standard with an integrated two button controller. Tables also ship standard with a more compact corded two-button remote control switch. This allows two switch options for every customer. All table controllers come standard with programmable container/shelf stop, and ISP (Intelligent System Protection). The stand-by power consumption is 0.3 watts. Refer to "Toggle Control Unit Product Specifications" (KI-62686) for more details.

Wire Trough
The wire trough is an optional accessory which must be ordered separately. Constructed of 18-gauge steel with a powder-coated finish which may be coordinated to match the color of table legs. Screws are provided for attachment to the underside of the tabletop, and tops are pre-drilled for wire trough locations.

Toggle Fixed-Base (Model FX)

General
The table consists of two T-bases (centered column on a horizontal foot) supporting a worksurface. The top of the worksurface is 29" from the floor. See next page for top sizes.

Base
The base consists of a top plate, column and foot all finished with baked-on 30 sheen powder-coat paint. The top plate is 6-gauge thick steel. The column consists of a 2 3/8" x 4 3/8" rectangular 14-gauge steel tubing with a 1/4" steel plate welded on the bottom and top end. The top plate is attached to the column with four 6mm bolts. The foot consists of an extruded aluminum component with a nylon toe cap inserted into each end. The foot is attached to the column with four 6mm bolts. Two 1 1/2" diameter nylon base leveling glides are threaded into the foot.

Furnishing Knowledge®

TECHNICAL SPECIFICATIONS (cont.)

Worksurface
Worksurfaces are constructed with 1 1/8" thick 45 lb. density particle core board. The top surface is covered with high-pressure laminate. The bottom surface is covered with a phenolic backing sheet. The perimeter is finished using high impact plastic edging. The worksurface is pre-drilled and attached to each mounting plate using seven #10 x 1" tapping screws.

Wire Trough
The wire trough is an optional accessory which must be ordered separately. Constructed of 18-gauge steel with a powder-coated finish which may be coordinated to match the color of table legs. Screws are provided for attachment to the underside of the tabletop, and tops are pre-drilled for wire trough locations.

DIMENSIONS - Tables

Dimensions	Model	Space Between Legs	Space Between Feet	Foot Sizes
24 x 48"	Dual Motor (EL)	35.66"	34.21"	23.625"
24 x 60"	Dual Motor (EL)	47.66"	46.21"	23.625"
24 x 72"	Dual Motor (EL)	59.66"	58.21"	23.625"
30 x 48"	Dual Motor (EL)	35.66"	34.21"	29.625"
30 x 60"	Dual Motor (EL)	47.66"	46.21"	29.625"
30 x 72"	Dual Motor (EL)	59.66"	58.21"	29.625"
36 x 48"	Dual Motor (EL)	35.66"	34.21"	29.625"
36 x 60"	Dual Motor (EL)	47.66"	46.21"	29.625"
36 x 72"	Dual Motor (EL)	59.66"	58.21"	29.625"
30 x 48"	Dual Motor (EL) 120° Corner	47.66"	46.21"	29.625"
24 x 48"	Fixed (FX)	35"	34.21"	23.625"
24 x 60"	Fixed (FX)	47"	46.21"	23.625"
24 x 72"	Fixed (FX)	59"	58.21"	23.625"
30 x 48"	Fixed (FX)	35"	34.21"	29.625"
30 x 60"	Fixed (FX)	47"	46.21"	29.625"
30 x 72"	Fixed (FX)	59"	58.21"	29.625"
36 x 48"	Fixed (FX)	35"	34.21"	29.625"
36 x 60"	Fixed (FX)	47"	46.21"	29.625"
36 x 72"	Fixed (FX)	59"	58.21"	29.625"

Foot sizes are 23.625" for the 24" tops and 29.625" for the 30" and 36" deep tops.


Table Operating Capacity Chart
Toggle Dual Motor

Model Number	Operating Load Capacity
TOGL2448EL	220 lbs.
TOGL2460EL	210 lbs.
TOGL2472EL	200 lbs.
TOGL3048EL	210 lbs.
TOGL3060EL	200 lbs.
TOGL3072EL	185 lbs.
TOGL3648EL	200 lbs.
TOGL3660EL	185 lbs.
TOGL3672EL	170 lbs.
TOGLC3048EL	180 lbs.


DIMENSIONS - Wire Trough

Wire Trough Width	Dual Motor Table Width
29"	48"
42"	60"
52"	72"


Wire Trough Width	Fixed Table Width
29"	60"
42"	72"

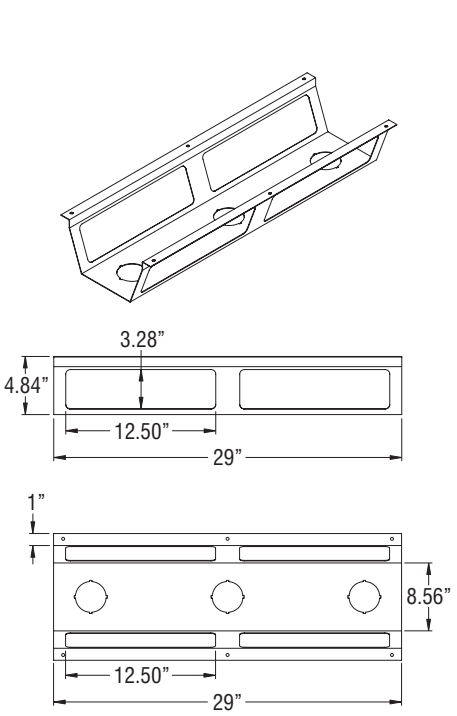

29” Wire Trough

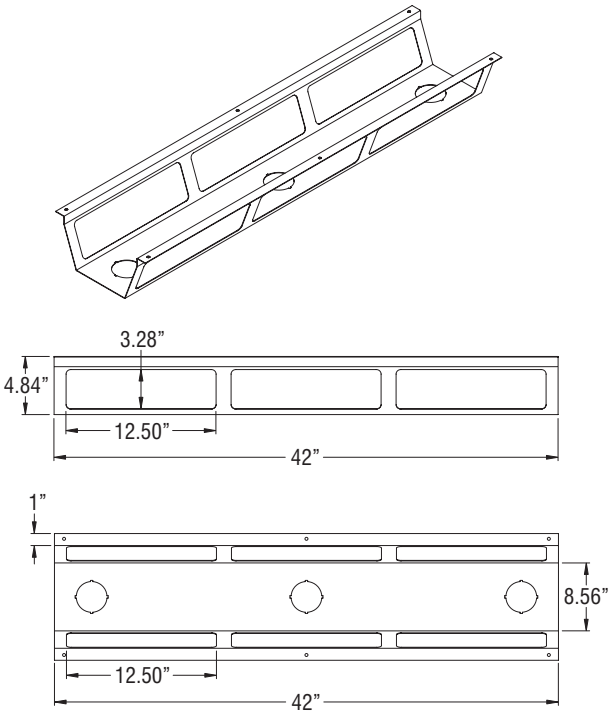

42” Wire Trough

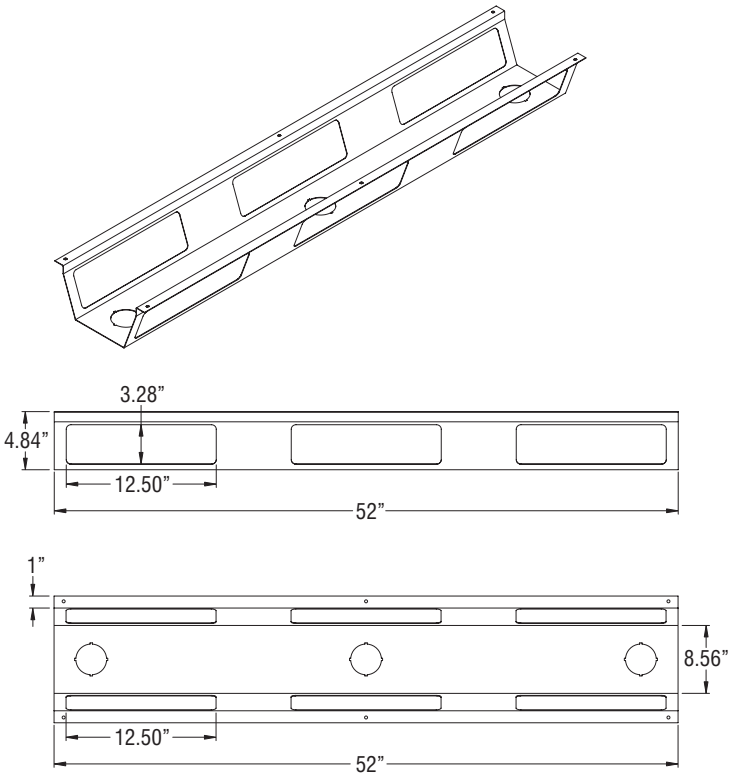


52” Wire Trough


Furnishing Knowledge®

Wire Trough Placement (Dual Motor Electric-Base Tables)


For Dual Motor Electric-Base Tables, an optional wire trough can be mounted directly over the cross support tubes. For 36" deep rectangular tables and 120-degree tables, the optional wire trough may also be mounted behind the cross support tubes if desired.

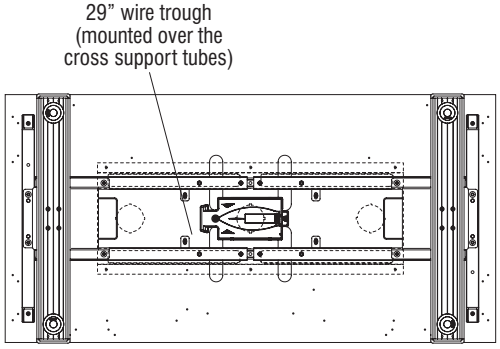

Rectangular Dual Motor Electric-Base Tables, 24"-36" Deep (24" x 48" Model EL shown)

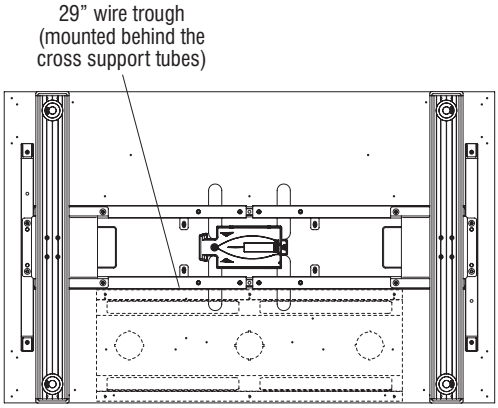


Rectangular Dual Motor Electric-Base Tables, 30"-36" Deep (30" x 48" Model EL shown)

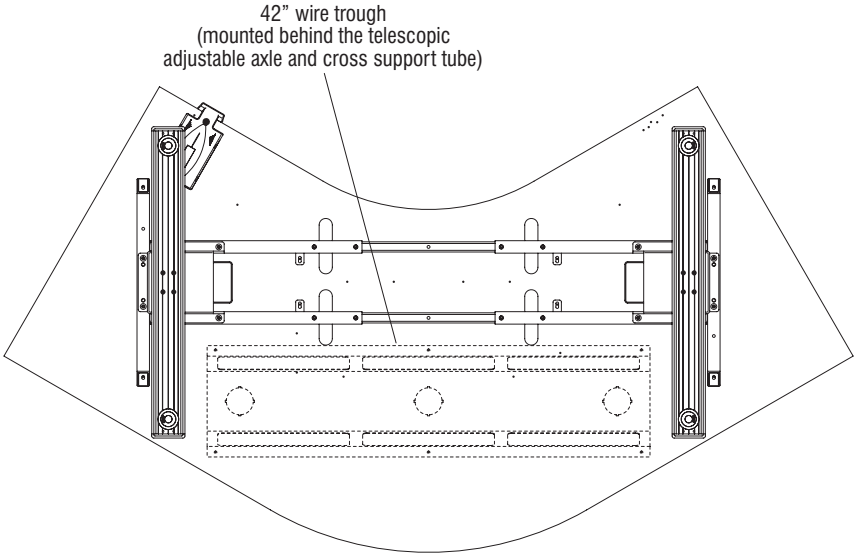


120° Dual Motor Electric-Base Tables, 30" Deep (30" x 48" Model SM shown)

Wire Trough Placement (Fixed-Base Tables)


For 60" and 72" wide Fixed-Base Tables, an optional wire trough can be mounted centered or along the rear edge of the tabletop. The optional wire troughs are not available for 48" wide rectangular tables due to insufficient clearance between the leg mounting plates.

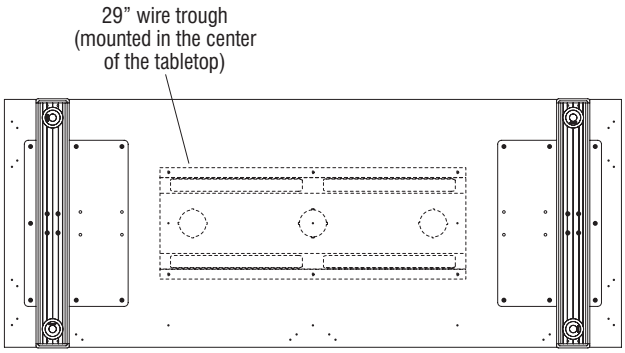

**Rectangular Fixed-Base Tables,
60"-72" Wide (24" x 60" Model FX shown)**

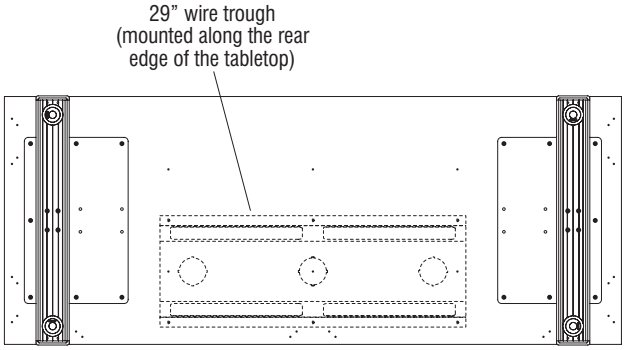

**Rectangular Fixed-Base Tables,
60"-72" Wide (24" x 60" Model FX shown)**

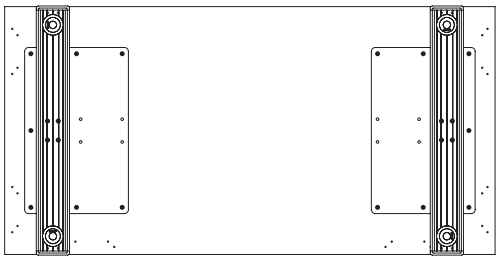


**Rectangular Fixed-Base Tables,
48" Wide (24" x 48" Model FX shown)**


Furnishing Knowledge®

STATEMENT OF LINE


Toggle Dual Motor Electric-Base (Model EL)

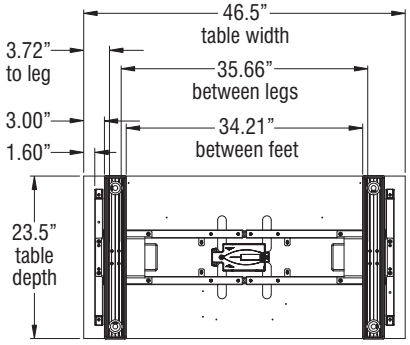


24" x 48"

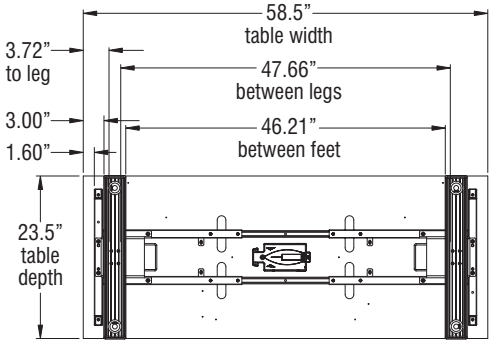


24" x 60"

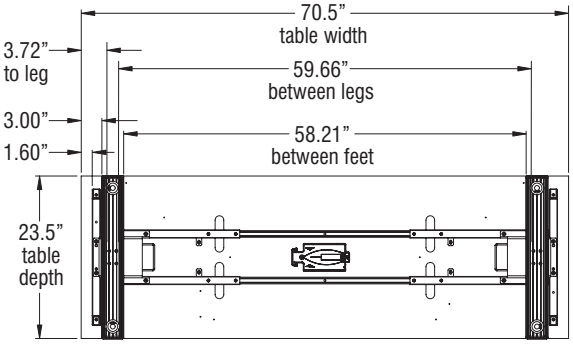


24" x 72"




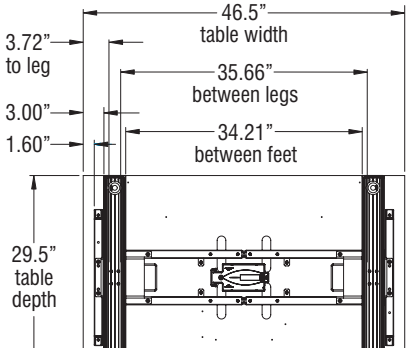


30" x 48"

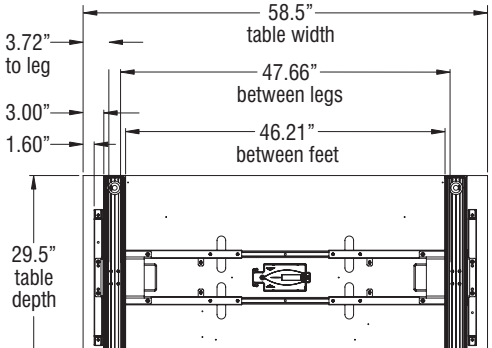

30" x 60"

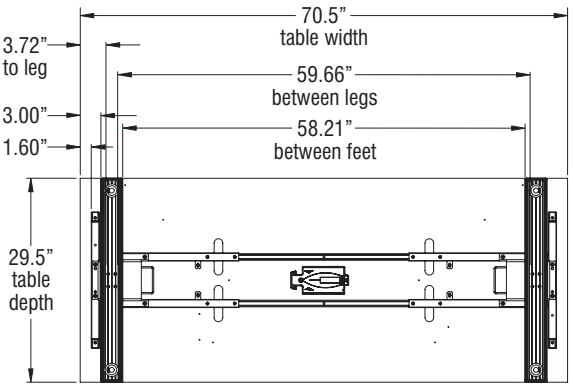


30" x 72"




Furnishing Knowledge®

STATEMENT OF LINE (cont.)


Toggle Dual Motor Electric-Base (Model EL)

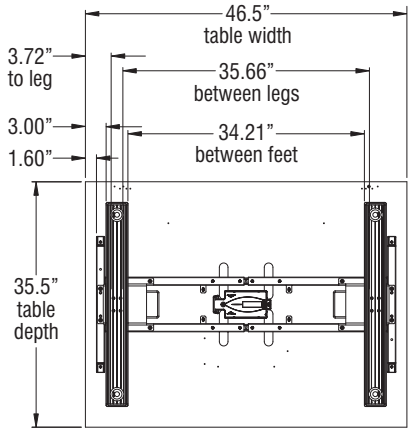


36" x 48"

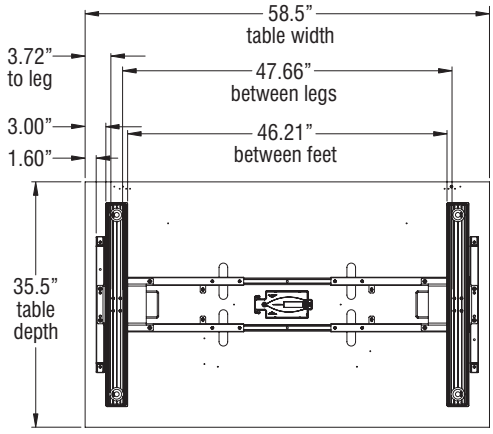


36" x 60"

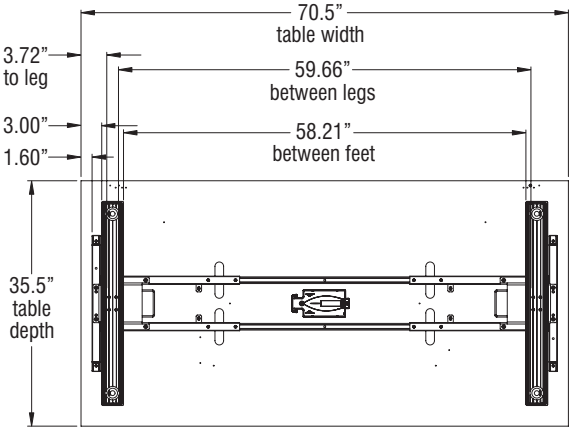


36" x 72"

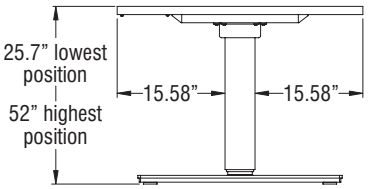

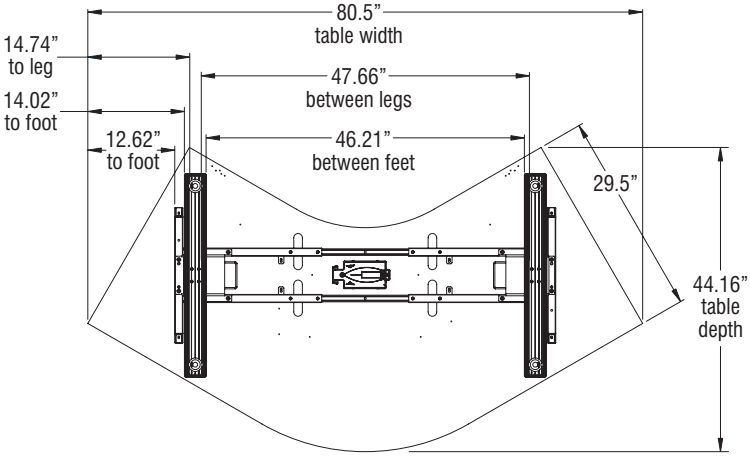


30" x 48" - 120° Corner

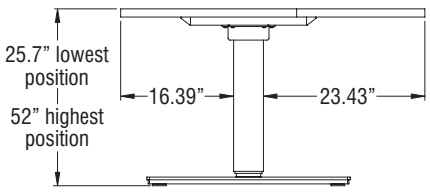


Furnishing Knowledge®

STATEMENT OF LINE (cont.)


Toggle Fixed-Base (Model FX)

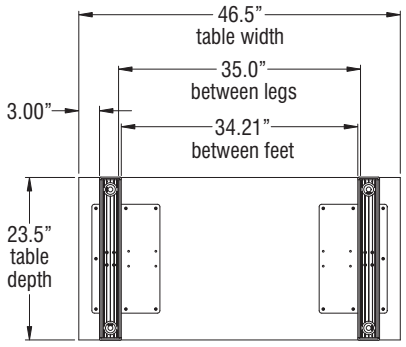


24" x 48"

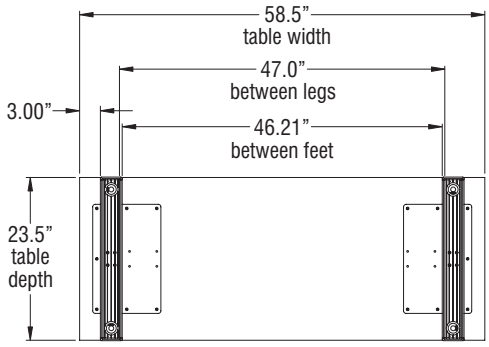


24" x 60"

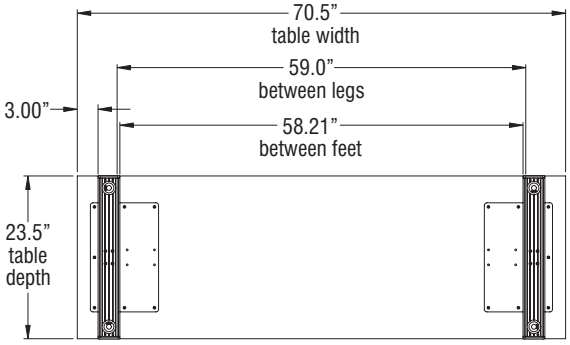


24" x 72"




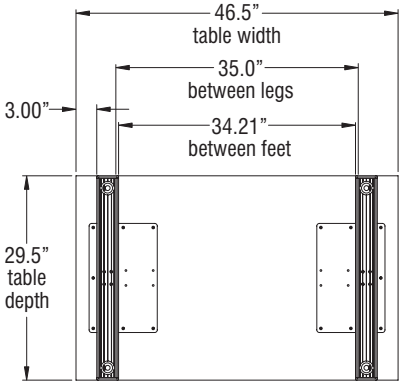


30" x 48"

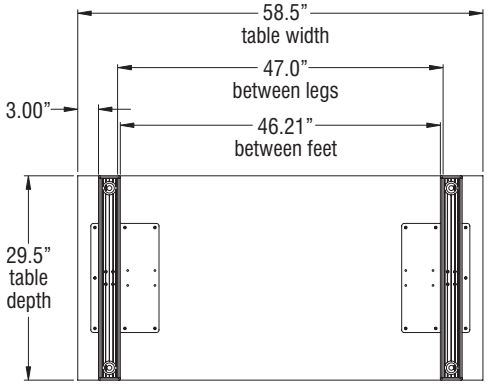

30" x 60"

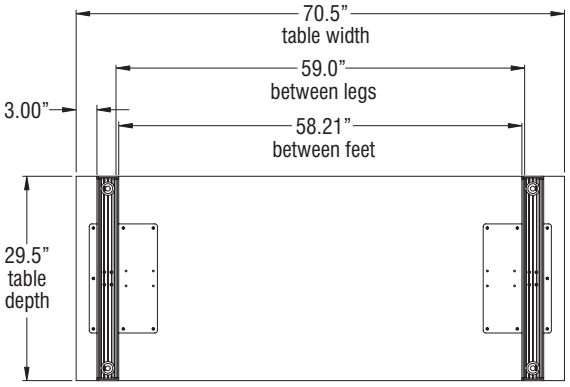


30" x 72"




Furnishing Knowledge®

STATEMENT OF LINE (cont.)


Toggle Fixed-Base (Model FX)

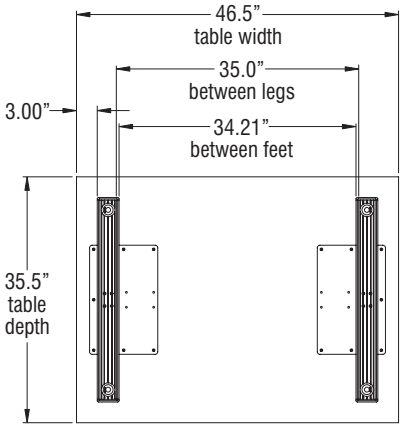


36” x 48”

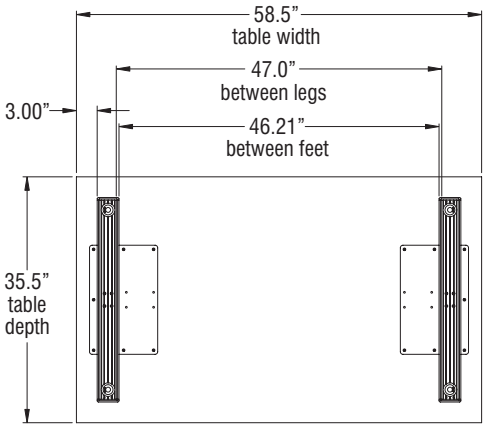

36” x 60”

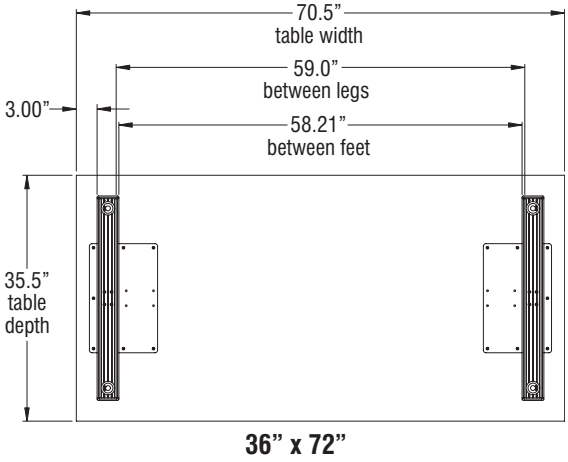

36” x 72”



© 2018 Krueger International, Inc. All Rights Reserved • Code KI-TS-000020R3/KI/PDF/0718

Furnishing Knowledge®