SitOnIt • Seating


Focus 2.0 Mesh


CAL 133 approved


Bleach cleanable


Focus Mesh


Slate

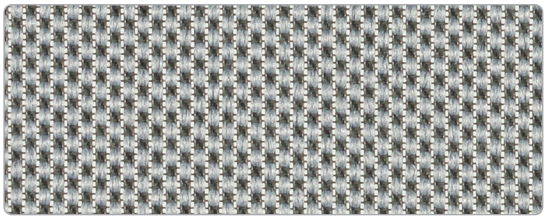

Sand



Black



Impress



Freeway


Focus 2.0 Mesh



Fog



Fog



Desert



Fire



Tangerine



Apple


Nickel

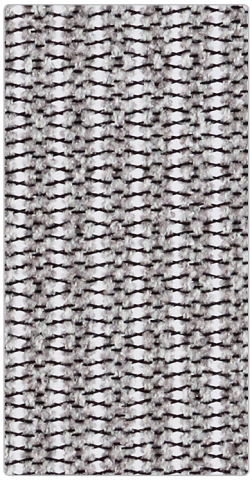

Ocean



Navy



Electric Blue



Onyx


Focus 2.0 Uptown Mesh


Ash


Ash


Dune


Charcoal


Midnight

Pattern	Content	Abrasion	Applicable ACT®	Cleaning Code
Focus Mesh	30% Polyester, 70% Polyelastomeric	100,000+ Double Rubs		WS BC (1:10)
Focus 2.0 Mesh	30% Polyester, 70% Polyelastomeric	100,000+ Double Rubs		BC (1:10)
Focus 2.0 Uptown Mesh	53% Polyester, 47% Plolyelastomeric	60,000+ Double Rubs		BC (1:10)

These patterns meet or exceed these ACT Performance standards for upholstery:

To see full repeat of mesh patterns, configure your product ChairBuilder.com.
To order samples, call 714.995.4800 or contact your local SitOnIt Seating sales rep.

icon upholstery definitions

Fire Retardency
Flammability testing determines a fabric's resistance to burning. Passes Cal 117.

Colorfastness to Wet and Dry Crocking
The rubbing off of color from fabric onto clothing, hands or other materials and can occur under wet or dry conditions. Passes AATCC 8-1974 Dry Crocking. Class 4 minimum, Wet Crocking. Class 3 minimum.

Colorfastness to Light
The degree to which fabric will retain its color when exposed to light. Passes AATCC 16A-1974 or AATCC 16E-1976. Class 4 minimum at 40 hours
Note: Class 4 minimum at 60 hours is recommended for direct sunlight exposure.

Physical Properties
Brush Pill Test to determine a fabric's pilling, Breaking/Tensile Strength Test determines the ability of a fabric to withstand tension without breaking or tearing. Seam Slippage Test determines the pulling apart of fabrics at the seams. Passes Brush Pill ASTM D3511, 3–4 minimum, Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft, Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft.

Abrasion
The ability of a fabric to withstand damage from wear and rubbing. Passes Heavy Duty Contract ASTM 3597 modified (No.10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM 4966 modified (with 21 oz. wt.); 40,000 rubs Martindale Method.

SitOnIt • Seating®

6415 Katella Ave.• Cypress, CA 90630
sitonit.net • 888.274.8664

Form No. C6226.9/19.8K @2019 Exemplis