
PRODUCT SPECIFICATIONS

Serenade™ Gathering Table

November 2020

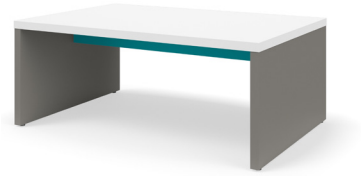

TECHNICAL SPECIFICATIONS

Tabletop

Tabletops are constructed of 2" thick, 45 lb density particle board core with 1/32" laminate finished top surface and 1/32" thick phenolic backing.

End Panels

End panels are constructed of 2" thick, 45 lb density particle board core finished with 1/32" laminate on both the front and back surface. The ends are finished with 1/32" Self Edge or matching laminate. The bottom is finished with black laminate. Tables 108"-144" wide come with an inset support leg constructed of 2" thick, 45 lb density particle board core finished with 1/32" laminate on both the front and back surface. 24" deep tables contain a 12" wide inset leg which is centered at the rear of the table to allow more leg clearance on the user side of the table. 30"-48" deep tables contain an 18" wide leg that is placed directly in the middle of the table construction to allow user clearance on both sides of the table. Adjustable glides are 1" diameter, 5/16-18 threaded floor glides and offer 1 1/2" of adjustability. These panel structures are secured to the tabletop with hardware and 9-gauge steel mounting plates.

Stringers and Modesty Panels

Tables are fitted with either 7 3/4" tall (on 29"H models) or 11 3/4" tall (on 42"H models) stringers or full-height modesty panels. These stringers and modesty panels are constructed of 1" thick, 45 lb density particle board core finished with 1/32" laminate on both the front and back surface. Power and data options and cables are routed and hidden within the stringers when specified. These panel structures are secured to the tabletop with hardware and 9-gauge steel mounting plates. On 18"-24" deep tables, the stringer or modesty panel is located to the rear of the tabletop allowing user seating or standing access from only one side of the table. On 30"-48" deep tables, the stringer or modesty panel is located along the center line of the tabletop, allowing user seating or standing access from both sides of the table.

Electrical (power module placement when specified)

Tables 60"-96" wide receive one power module, or grommet centered along the length of the tabletop. Tables 108"-144" wide receive two power modules, or grommets each centered between the center and end legs. Tables 18"-24" deep have the power module or modules to be 6" from the rear edge of the tabletop to the center of the module cutout. Tables 30"-48" deep have the power module or modules to be centered from the front edge to back on the tabletop.

PowerUp® Module with 3-Prong Plug

Tables are available with one or two PowerUp modules per table. Tables with widths of 84" or less always get one module while tables with widths of 96" or more always get two modules. The PowerUp module is a UL listed relocatable power tap, which is a surface-mounted power module with a plastic cover. When open, two simplex power receptacles and two data jack openings are exposed. The module is 3 1/4" wide x 7" long and 2 1/4" tall when opened and fits securely into a 6 1/4" x 3" cutout, still allowing removal without tools. It is provided with a 15 ft cord and 3-prong plug, rated 120VAC, 15A. The module is constructed of polycarbonate with a textured finish, meeting UL 94 V-0 Flame Class minimum requirements. The module has two simplex receptacles, rated at 15 Amps/125 Volts and two locations for data connectors. Snap-in data plates hold data connectors and allow the standard module to accommodate most manufacturers. The data connectors are not supplied with the module and are purchased by the customer. The module has a dampened spring-loaded mechanism to allow the unit to open for use and close when not in use. The power receptacles open above the plane of the tabletop to avoid accidental spills into the receptacle. Data jacks remain stationary to avoid excess wear and tear on the wire connections and promote transmission of data communication. Data ports are molded to accept RJ45 jacks, but can be modified to accept various brands of jacks. Data connectors are not supplied with the module and are purchased separately.

KI Furnishing Knowledge®

TECHNICAL SPECIFICATIONS

Villa™ Power Module with 3-Prong Plug

Tables are available with one or two Villa power modules per table. Tables with widths of 84" or less always get one module while tables with widths of 96" or more always get two modules.

The Villa power module is an Interek ETL Listed Furniture Power Distribution Unit surface module that mounts below a 6 1/4" x 3" grommet cutout in the tabletop. The module is 3 1/2" wide x 6 3/4" long and 2" tall when opened. It is provided with a 15 ft cord and 3-prong plug, rated 120VAC, 15A. When open, two simplex power receptacles, two USB charging ports and one data jack opening are exposed. An additional simplex receptacle is located at the underside. The module can be modified to fit various brand jacks. Data connectors are not supplied with the module and are purchased by the customer. Metal grommet cover is included.

4-Port Module

The USB/AC power module houses two 125 volt, 15-amp AC outlet and four 5V DC, USB (type 2.0 and type 3.0 compatible) charging plug-in receptacles with 2.1 amp DC total power (no data). The power cord is a 14 AWG, 15-amp NEMA rated three conductor SJT, cord 15 ft in length with a 3-prong grounded plug. The circuitry is contained in an extruded aluminum housing. The entire electrical power module assembly is UL listed and passes a UL spill test rating for protection against liquids. Both USB ports can power and charge separate tablets, simultaneously.

Integrated Leg Wireway

When power is specified, each end panel and middle leg comes standard with a vertical integrated wireway cavity that measures 1 3/8" x 3 1/4". This is designed for passing cords and cables through the leg. Access is through a 2 1/2" hole near the top, at the inside of the leg and a 2 1/2" hole near the bottom of the leg. Chrome finished covers are provided to cover the bottom access holes. Where center table legs are needed with power specifications the grommet access is on both sides of the leg at the top and bottom.

Velcro® Wire Management

The Velcro® wire manager is constructed of 2" x 4 1/2" Velcro® hook and loop material. Wire manager is provided with adhesive backing and screws for attachment to the underside of the top. Tops are not pre-drilled for locating wire manager, so the manager may be applied in any convenient location. One wire manager is included for each power module ordered. Field installed.

Accessories

Bag Hook

The hook is constructed of 1/4" steel rod with a Chrome finish. It is attached to the underside of the top with two screws (provided). On 18"-24" deep tabletops, coat hooks may only be used on the front, user side of the table. On 30"-48" deep tabletops, coat hooks may be used on both sides of the table. 60" & 72" wide tables may use up to two hooks per side. 84" & 96" wide tables may use up to three hooks per side. 108", 120" & 144" wide tables may use up to four hooks per side.

Footrest

The optional footrest is constructed of a 1 1/2" diameter, 12-gauge DOM steel tube, milled at each end, containing welded-in inserts with a tapered slot. #12 x 1" Phillips screws, installed into end leg panels at 6" from the edge of the leg panel and 6 1/2" up from the bottom of the panel capture the tapered slot in the insert at the outside ends of the footrest tubes and hold the footrest in place. In specific width conference tables (see below), a two-piece footrest design is required, utilizing a center foot support which connects the two outer footrest halves together using #10-24 x 1/2" Torque thread cutting screws. The foot support also mounts to the conference table's middle leg panel using a #12 x 1" Phillips screw with tapered insert design. The center foot support is of milled and welded construction and contains a 1" diameter, 5/16-18 threaded floor glide offering 1 1/2" of adjustability. 60"-90" wide tables use the one-piece footrest. 108"-144" wide tables use the two-piece footrest construction, with the center foot support. On 18"-24" deep tabletops, the footrest may only be used on the front, user side of the table. On 30"-48" deep tables, footrests may be used on both sides of the table. The footrest and center foot support may be specified as bright nickel-chrome plated, or finished in either Starlight Silver, Black or Flannel powder-coat paint.

CODE COMPLIANCE

BIFMA INTERNATIONAL


KI Furnishing Knowledge®

DIMENSIONS


Serenade Gathering Table (Standard Height)

Model Number	A Table Depth	B Table Width	C Table Height	D Space Between Legs	E	F	G	H 4" Stringer to Floor	I 8" Stringer to Floor
SEGS1860L	17.88"	59.88"	29.03"	55.47"	6.59"	8.63"	-	22.95"	19.20"
SEGS1872L	17.88"	71.88"	29.03"	67.47"	6.59"	8.63"	-	22.95"	19.20"
SEGS1884L	17.88"	83.88"	29.03"	79.47"	6.59"	8.63"	-	22.95"	19.20"
SEGS1896L	17.88"	95.88"	29.03"	91.47"	6.59"	8.63"	-	22.95"	19.20"
SEGS2460L	23.88"	59.88"	29.03"	55.47"	9.59"	11.63"	-	22.95"	19.20"
SEGS2472L	23.88"	71.88"	29.03"	67.47"	9.59"	11.63"	-	22.95"	19.20"
SEGS2484L	23.88"	83.88"	29.03"	79.47"	9.59"	11.63"	-	22.95"	19.20"
SEGS2496L	23.88"	95.88"	29.03"	91.47"	9.59"	11.63"	-	22.95"	19.20"


Note: The Serenade Gathering Table - Standard Height figures shown below are represented with model SEGS2460L.

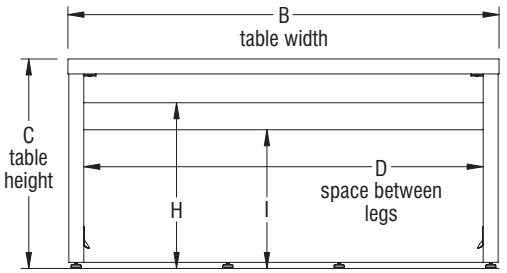


(front view)



(side view)

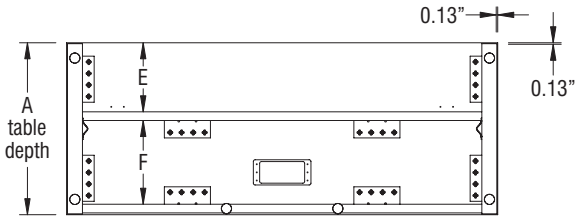

Powered Table (bottom view)

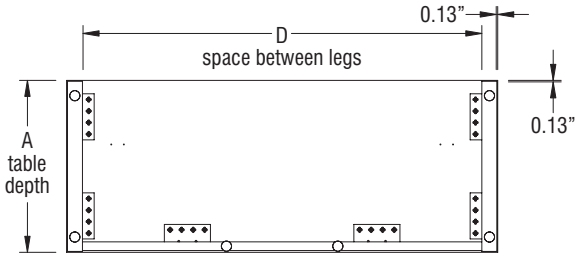


Non Powered Table (bottom view)

DIMENSIONS


Serenade Gathering Table (Standard Height) (cont.)

Model Number	A Table Depth	B Table Width	C Table Height	D Space Between Legs	E	F	G	H 4" Stringer to Floor	I 8" Stringer to Floor
SEGS24108L	23.88"	107.88"	29.03"	50.70"	9.59"	11.63"	-	22.95"	19.20"
SEGS24120L	23.88"	119.88"	29.03"	56.47"	9.59"	11.63"	-	22.95"	19.20"
SEGS24144L	23.88"	131.88"	29.03"	68.47"	9.59"	11.63"	-	22.95"	19.20"


Note: The Serenade Gathering Table - Standard Height figures shown below are represented with model SEGS24108L.

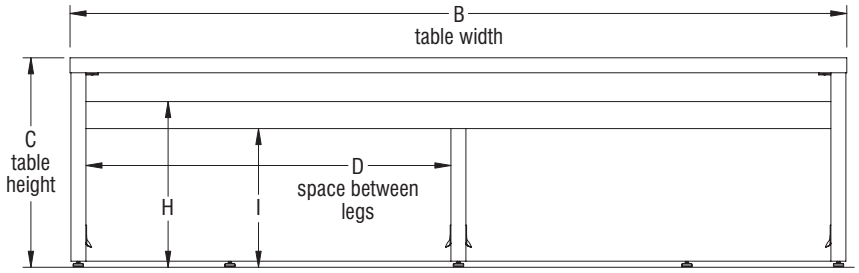

(front view)



(side view)

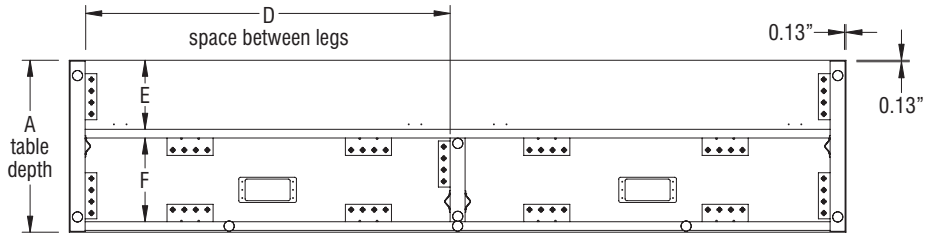


Powered Table (bottom view)

DIMENSIONS


Serenade Gathering Table (Standard Height) (cont.)

Model Number	A Table Depth	B Table Width	C Table Height	D Space Between Legs	E	F	G	H 4" Stringer to Floor	I 8" Stringer to Floor
SEGS3060L	29.88"	59.88"	29.03"	55.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS3072L	29.88"	71.88"	29.03"	67.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS3084L	29.88"	83.88"	29.03"	79.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS3096L	29.88"	95.88"	29.03"	91.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS3660L	35.88"	59.88"	29.03"	55.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS3672L	35.88"	71.88"	29.03"	67.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS3684L	35.88"	83.88"	29.03"	79.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS3696L	35.88"	95.88"	29.03"	91.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS4260L	41.88"	59.88"	29.03"	55.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS4272L	41.88"	71.88"	29.03"	67.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS4284L	41.88"	83.88"	29.03"	79.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS4296L	41.88"	95.88"	29.03"	91.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS4860L	47.88"	59.88"	29.03"	55.47"	15.94"	13.59"	23.34"	22.95"	19.20"
SEGS4872L	47.88"	71.88"	29.03"	67.47"	15.94"	13.59"	23.34"	22.95"	19.20"
SEGS4884L	47.88"	83.88"	29.03"	79.47"	15.94"	13.59"	23.34"	22.95"	19.20"
SEGS4896L	47.88"	95.88"	29.03"	91.47"	15.94"	13.59"	23.34"	22.95"	19.20"


Note: The Serenade Gathering Table - Standard Height figures shown below are represented with model SEGS3060L.

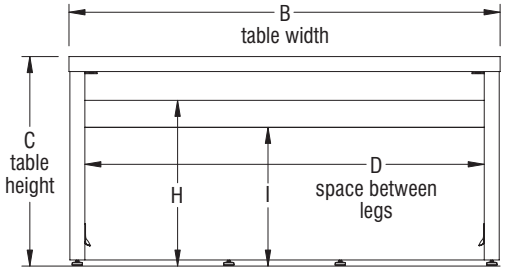


(front view)



(side view)

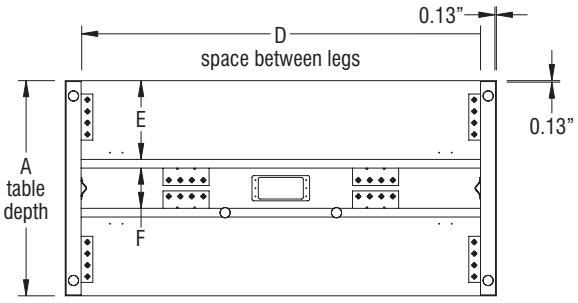

Powered Table (bottom view)

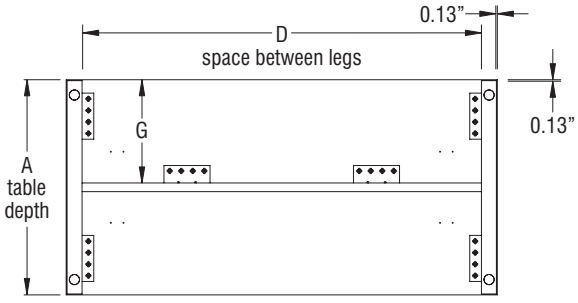


Non Powered Table (bottom view)

DIMENSIONS


Serenade Gathering Table (Standard Height) (cont.)

Model Number	A Table Depth	B Table Width	C Table Height	D Space Between Legs	E	F	G	H 4" Stringer to Floor	I 8" Stringer to Floor
SEGS30108L	29.88"	107.88"	29.03"	50.70"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS30120L	29.88"	119.88"	29.03"	56.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS30144L	29.88"	131.88"	29.03"	68.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS36108L	35.88"	107.88"	29.03"	50.70"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS36120L	35.88"	119.88"	29.03"	56.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS36144L	35.88"	131.88"	29.03"	68.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS42108L	41.88"	107.88"	29.03"	50.70"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS42120L	41.88"	119.88"	29.03"	56.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS42144L	41.88"	131.88"	29.03"	68.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS48108L	47.88"	107.88"	29.03"	50.70"	15.94"	13.59"	23.34"	22.95"	19.20"
SEGS48120L	47.88"	119.88"	29.03"	56.47"	15.94"	13.59"	23.34"	22.95"	19.20"
SEGS48144L	47.88"	131.88"	29.03"	68.47"	15.94"	13.59"	23.34"	22.95"	19.20"


Note: The Serenade Gathering Table - Standard Height figures shown below are represented with model SEGS30108L.

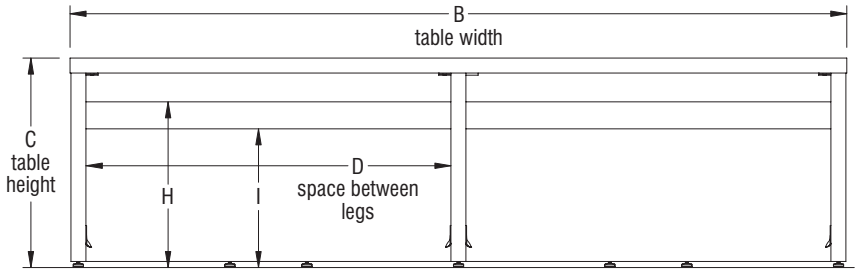


(front view)



(side view)

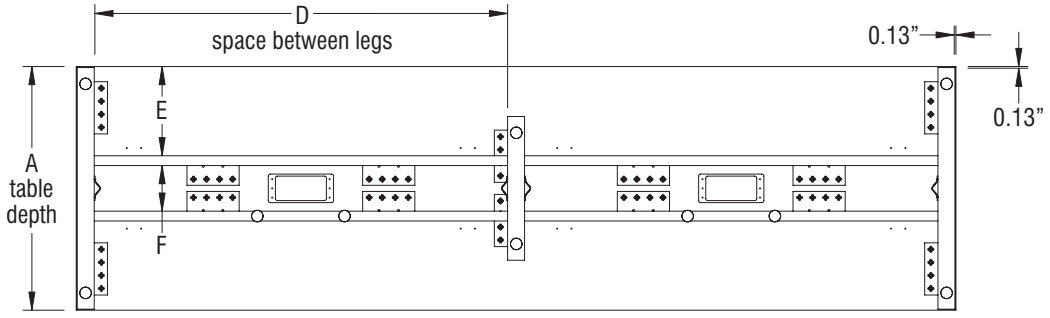

Powered Table (bottom view)

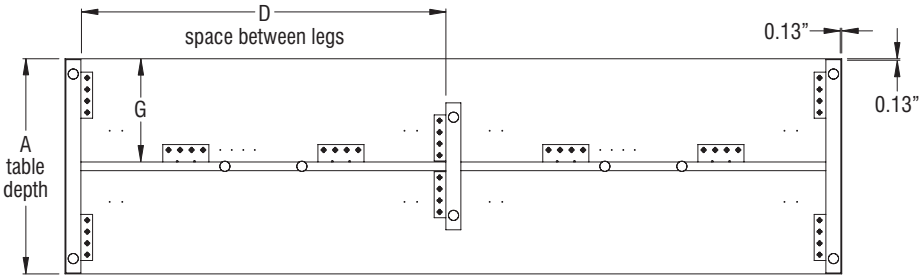


Non Powered Table (bottom view)

DIMENSIONS


Serenade Gathering Table (Café Height)

Model Number	A Table Depth	B Table Width	C Table Height	D Space Between Legs	E	F	G	H 4" Stringer to Floor	I 12" Stringer to Floor
SEGH1860L	17.88"	59.88"	42.03"	55.47"	6.59"	8.63"	-	35.95"	28.20"
SEGH1872L	17.88"	71.88"	42.03"	67.47"	6.59"	8.63"	-	35.95"	28.20"
SEGH1884L	17.88"	83.88"	42.03"	79.47"	6.59"	8.63"	-	35.95"	28.20"
SEGH1896L	17.88"	95.88"	42.03"	91.47"	6.59"	8.63"	-	35.95"	28.20"
SEGH2460L	23.88"	59.88"	42.03"	55.47"	9.59"	11.63"	-	35.95"	28.20"
SEGH2472L	23.88"	71.88"	42.03"	67.47"	9.59"	11.63"	-	35.95"	28.20"
SEGH2484L	23.88"	83.88"	42.03"	79.47"	9.59"	11.63"	-	35.95"	28.20"
SEGH2496L	23.88"	95.88"	42.03"	91.47"	9.59"	11.63"	-	35.95"	28.20"


Note: The Serenade Gathering Table - Café Height figures shown below are represented with model SEGH2460L.

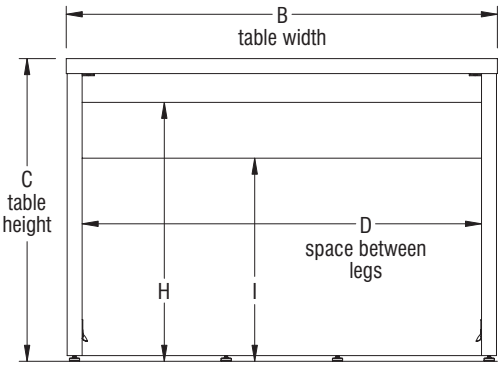


(front view)

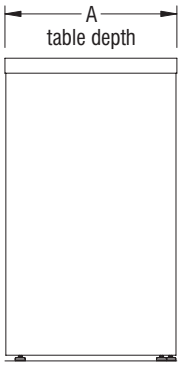

(side view)

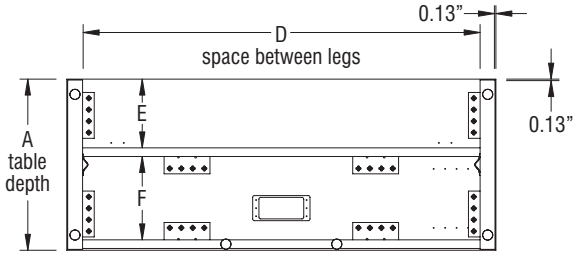

Powered Table (bottom view)

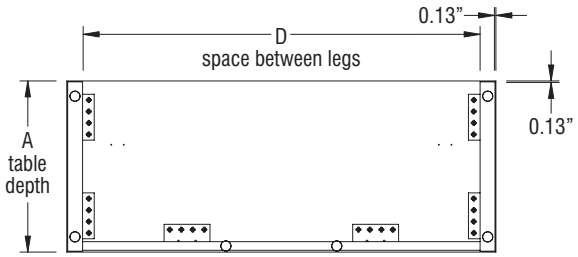


Non Powered Table (bottom view)

DIMENSIONS


Serenade Gathering Table - Café Height (cont.)

Model Number	A Table Depth	B Table Width	C Table Height	D Space Between Legs	E	F	G	H 4" Stringer to Floor	I 12" Stringer to Floor
SEGH24108L	23.88"	107.88"	42.03"	50.70"	9.59"	11.63"	-	35.95"	28.20"
SEGH24120L	23.88"	119.88"	42.03"	56.47"	9.59"	11.63"	-	35.95"	28.20"
SEGH24144L	23.88"	131.88"	42.03"	68.47"	9.59"	11.63"	-	35.95"	28.20"


Note: The Serenade Gathering Table - Café Height figures shown below are represented with model SEGH24108L.

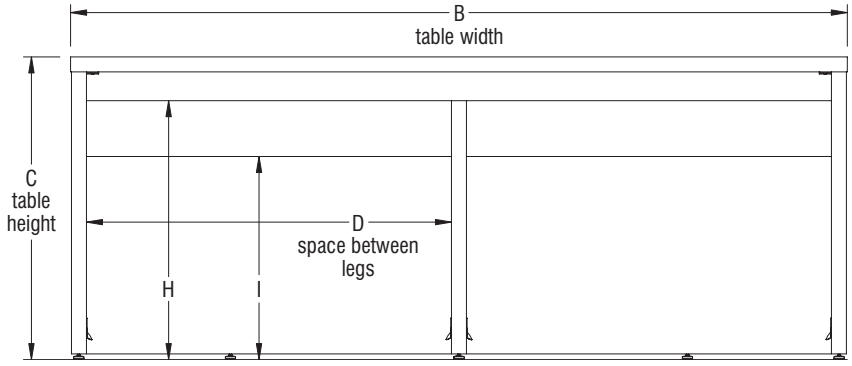


(front view)

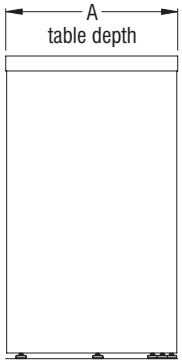

(side view)

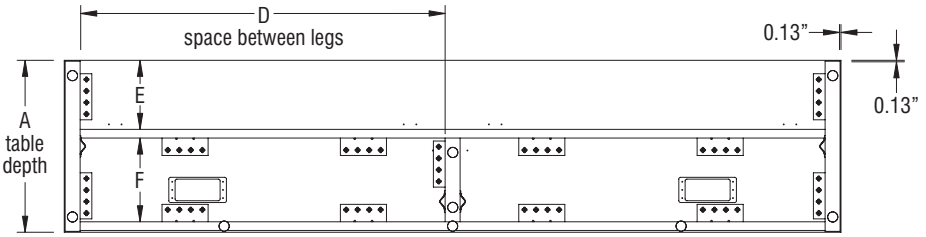

Powered Table (bottom view)

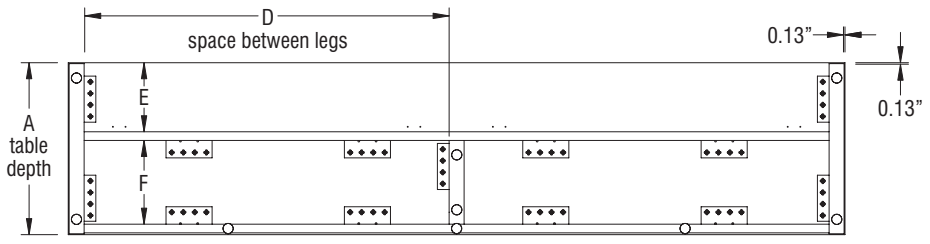


Non Powered Table (bottom view)

DIMENSIONS


Serenade Gathering Table - Café Height (cont.)

Model Number	A Table Depth	B Table Width	C Table Height	D Space Between Legs	E	F	G	H 4" Stringer to Floor	I 12" Stringer to Floor
SEGS3060L	29.88"	59.88"	42.03"	55.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS3072L	29.88"	71.88"	42.03"	67.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS3084L	29.88"	83.88"	42.03"	79.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS3096L	29.88"	95.88"	42.03"	91.47"	10.94"	5.59"	14.34"	22.95"	19.20"
SEGS3660L	35.88"	59.88"	42.03"	55.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS3672L	35.88"	71.88"	42.03"	67.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS3684L	35.88"	83.88"	42.03"	79.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS3696L	35.88"	95.88"	42.03"	91.47"	12.94"	7.59"	17.34"	22.95"	19.20"
SEGS4260L	41.88"	59.88"	42.03"	55.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS4272L	41.88"	71.88"	42.03"	67.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS4284L	41.88"	83.88"	42.03"	79.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS4296L	41.88"	95.88"	42.03"	91.47"	14.44"	10.59"	20.34"	22.95"	19.20"
SEGS4860L	47.88"	59.88"	42.03"	55.47"	15.94"	13.59"	23.34"	22.95"	19.20"
SEGS4872L	47.88"	71.88"	42.03"	67.47"	15.94"	13.59"	23.34"	22.95"	19.20"
SEGS4884L	47.88"	83.88"	42.03"	79.47"	15.94"	13.59"	23.34"	22.95"	19.20"
SEGS4896L	47.88"	95.88"	42.03"	91.47"	15.94"	13.59"	23.34"	22.95"	19.20"


Note: The Serenade Gathering Table - Café Height figures shown below are represented with model SEGH3060L.

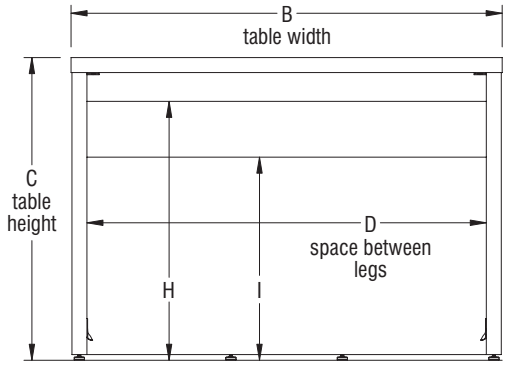


(front view)

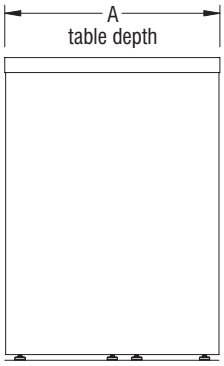

(side view)

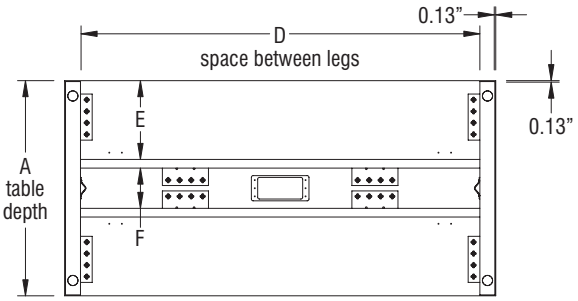

Powered Table (bottom view)

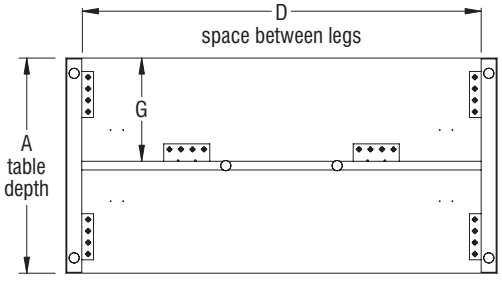


Non Powered Table (bottom view)

DIMENSIONS


Serenade Gathering Table - Café Height (cont.)

Model Number	A Table Depth	B Table Width	C Table Height	D Space Between Legs	E	F	G	H 4" Stringer to Floor	I 12" Stringer to Floor
SEGH30108L	29.88"	107.88"	42.03"	50.70"	10.94"	5.59"	14.34"	35.95"	28.20"
SEGH30120L	29.88"	119.88"	42.03"	56.47"	10.94"	5.59"	14.34"	35.95"	28.20"
SEGH30144L	29.88"	131.88"	42.03"	68.47"	10.94"	5.59"	14.34"	35.95"	28.20"
SEGH36108L	35.88"	107.88"	42.03"	50.70"	12.94"	7.59"	17.34"	35.95"	28.20"
SEGH36120L	35.88"	119.88"	42.03"	56.47"	12.94"	7.59"	17.34"	35.95"	28.20"
SEGH36144L	35.88"	131.88"	42.03"	68.47"	12.94"	7.59"	17.34"	35.95"	28.20"
SEGH42108L	41.88"	107.88"	42.03"	50.70"	14.44"	10.59"	20.34"	35.95"	28.20"
SEGH42120L	41.88"	119.88"	42.03"	56.47"	14.44"	10.59"	20.34"	35.95"	28.20"
SEGH42144L	41.88"	131.88"	42.03"	68.47"	14.44"	10.59"	20.34"	35.95"	28.20"
SEGH48108L	47.88"	107.88"	42.03"	50.70"	15.94"	13.59"	23.34"	35.95"	28.20"
SEGH48120L	47.88"	119.88"	42.03"	56.47"	15.94"	13.59"	23.34"	35.95"	28.20"
SEGH48144L	47.88"	131.88"	42.03"	68.47"	15.94"	13.59"	23.34"	35.95"	28.20"


Note: The Serenade Gathering Table - Café Height figures shown below are represented with model SEGH30108L.

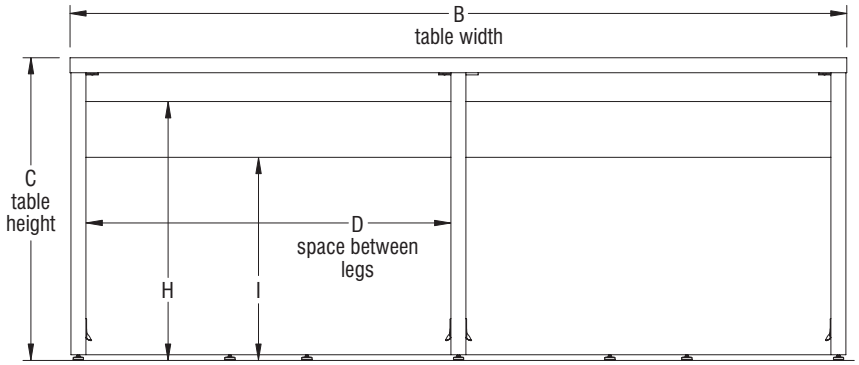


(front view)

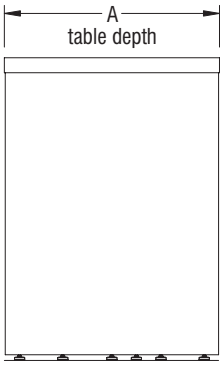

(side view)

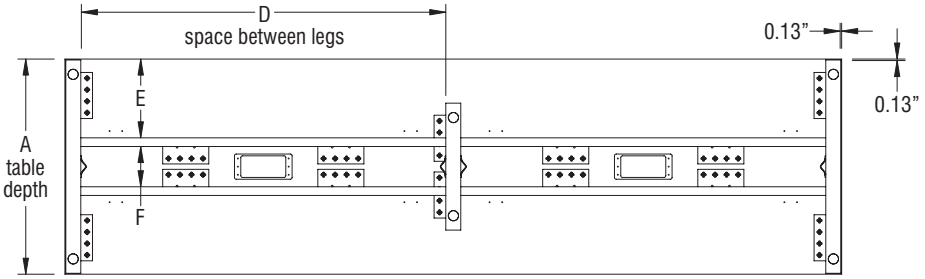


Powered Table (bottom view)

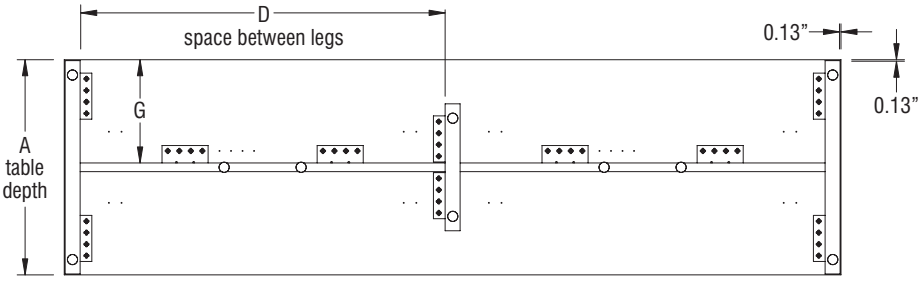


Non Powered Table (bottom view)

STATEMENT OF LINE

Serenade Gathering Table



Serenade Gathering Table - Standard Height
(model SEGS2460L shown)

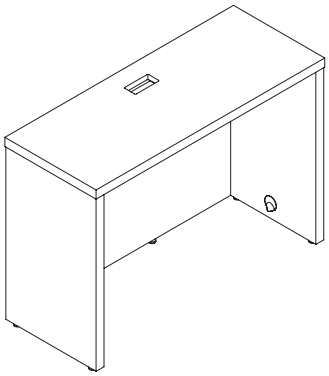

Serenade Gathering Table - Café Height
(model SEGH2460L shown)

CODE COMPLIANCE

© 2020 Krueger International, Inc. All Rights Reserved • Code KI-TS-000061R5/KI/PDF/1120

Furnishing Knowledge®